



COMP9242
Advanced Operating Systems
S2/2011 Week 6:
Performance Evaluation



NICTA Funding and Supporting Members and Partners



Overview

- Performance
- Benchmarking
- Profiling
- Performance analysis



Copyright Notice



These slides are distributed under the Creative Commons Attribution 3.0 License

- You are free:
 - to share—to copy, distribute and transmit the work
 - to remix—to adapt the work
- under the following conditions:
 - **Attribution:** You must attribute the work (but not in any way that suggests that the author endorses you or your use of the work) as follows:
 - “Courtesy of Gernot Heiser, [Institution]”, where [Institution] is one of “UNSW” or “NICTA”

The complete license text can be found at <http://creativecommons.org/licenses/by/3.0/legalcode>

Purpose of Performance Evaluation



Research:

- Establish performance advantages/disadvantages of approach
 - may investigate performance limits
 - should investigate tradeoffs

Development:

- Ensure product meets performance objectives
 - new features must not unduly impact performance of existing features
 - quality assurance

Purchasing:

- Ensure proposed solution meets requirements
 - avoid buying snake oil
- Identify best of several competing products

Different objectives may require different approaches

Benchmarking in Research

- Generally one of two objectives:
 - Show new approach improves performance
 - Show otherwise attractive approach does not undermine performance
- Requirement: objectivity/fairness
 - Selection of baseline
 - Inclusion of relevant alternatives
 - Fair evaluation of alternatives
- Requirement: analysis/explanation of results
 - Model of system, incorporating relevant parameters
 - Hypothesis of behaviour
 - Results must support hypothesis



What Performance?

- Cold cache vs hot cache
 - hot-cache figures are easy to produce and reproduce
 - but are they meaningful?
- Best case vs average case vs worst case
 - best-case figures are nice — but are they useful?
 - average case — what defines the “average”?
 - expected case — what defines it?
 - worst case — is it really “worst” or just bad? Does it matter?
- What does “performance” mean?
 - is there an absolute measure?
 - can it be compared? With what?
 - *Benchmarking*

Note: Always analyse performance before optimising!

- Ensure that you focus on the bottlenecks, they may be non-obvious!



Overview

- Performance
- **Benchmarking**
- Profiling
- Performance analysis



Lies, Damned Lies, Benchmarks

- Micro- vs macro-benchmarks
- Synthetic vs “real-world”
- Benchmark suites, use of subsets
- Completeness of results
- Significance of results
- Baseline for comparison
- Benchmarking ethics
- What is good — analysing the results



Micro- vs Macro-Benchmarks



- Macro-benchmarks
 - Use realistic workloads
 - Measure real-life system performance (hopefully)
- Micro-benchmarks
 - Exercise particular operation, e.g. single system call
 - Good for analysing performance / narrowing down performance bottlenecks
 - critical operation is slower than expected
 - critical operation performed more frequently than expected
 - operation is unexpectedly critical (because it's too slow)

Micro- vs Macro-Benchmarks



Benchmarking Crime: Micro-benchmarks only:

- Pretend micro-benchmarks represent overall system performance
- Real performance can in general not be assessed with micro-benchmarks
- Exceptions:
 - Focus is on improving particular operation known to be critical
 - There is an established base line

Note: My macro-benchmark is your micro-benchmark

- Depends on the level on which you are operating
- Eg: Imbench
 - ... is a Linux micro-benchmark suite
 - ... is a hypervisor macro-benchmark

Synthetic vs “Real-world” Benchmarks



- Real-world benchmarks:
 - real code taken from real problems
 - Livermore loops, SPEC, EEMBC, ...
 - execution traces taken from real problems
 - distributions taken from real use
 - file sizes, network packet arrivals and sizes
 - Caution: representative for one scenario doesn't mean for every scenario!
 - may not provide complete coverage of relevant data space
 - may be biased
- Synthetic benchmarks
 - created to simulate certain scenarios
 - tend to use random data, or extreme data
 - may represent unrealistic workloads
 - may stress or omit pathological cases

Standard vs Ad-Hoc Benchmarks



Why use ad-hoc benchmarks?

- There may not be a suitable standard
 - Eg lack of standardised multi-tasking workloads
- Cannot run standard benchmarks
 - Limitations of experimental system
 - Resource-constrained embedded system

Why not use ad-hoc benchmarks?

- Not comparable to other work
- Poor reproducibility

Facit: Use ad-hoc BMs only if you have no choice!

- Justify your approach carefully

Benchmark Suites



- Widely used (and abused!)
- Collection of individual benchmarks, aiming to cover all of relevant data space
- Examples: SPEC CPU{92|95|2000|2006}
 - Originally aimed at evaluating processor performance
 - Heavily used by computer architects
 - Widely (ab)used for other purposes
 - Integer and floating-point suite
 - Some short, some long-running
 - Range of behaviours from memory-intensive to CPU-intensive
 - behaviour changes over time, as memory systems change
 - need to keep increasing working sets to ensure significant memory loads

Obtaining an Overall Score for a BM Suite



- How can we get a single figure of merit for the whole suite?
- Example: comparing 3 systems on suite of 2 BMs

Benchmark	System X	System Y	System Z
1	20	10	40
2	40	80	20
Total	60	90	60
Mean	30	45	30

- Does the mean make sense?
 - It does where the total (sum) execution time has meaning
 - What if the individual BMs are independent and the sum has no meaning?

Obtaining an Overall Score for a BM Suite (2)



- Individual BMs frequently normalised to baseline system
- Eg: Normalise to *System X*

Benchmark	System X		System Y		System Z	
	Abs	Rel	Abs	Rel	Abs	Rel
1	20	1.00	10	0.50	40	2.00
2	40	1.00	80	2.00	20	0.50
Mean	30	1.00	45	1.25	30	1.25

- Does the mean make sense?

Obtaining an Overall Score for a BM Suite (3)



- Individual BMs frequently normalised to baseline system
- Eg: Normalise to *System Y*

Benchmark	System X		System Y		System Z	
	Abs	Rel	Abs	Rel	Abs	Rel
1	20	2.00	10	1.00	40	4.00
2	40	0.50	80	1.00	20	0.25
Mean	30	2.50	45	1.00	30	2.13

- Does the mean make sense?

Obtaining an Overall Score for a BM Suite (4)

- Individual BMs frequently normalised to baseline system
- Eg: Normalise to *System X*
- How about the geometric mean: $\langle X \rangle = (\prod X_i)^{1/i}$

Benchmark	System X		System Y		System Z	
	Abs	Rel	Abs	Rel	Abs	Rel
1	20	1.00	10	0.50	40	2.00
2	40	1.00	80	2.00	20	0.50
Geom. mean		1.00		1.00		1.00

- Does the geometric mean make sense?



Obtaining an Overall Score for a BM Suite (5)

- Individual BMs frequently normalised to baseline system
- Eg: Normalise to *System Y*
- How about the geometric mean: $\langle X \rangle = (\prod X_i)^{1/i}$

Benchmark	System X		System Y		System Z	
	Abs	Rel	Abs	Rel	Abs	Rel
1	20	2.00	10	1.00	40	4.00
2	40	0.50	80	1.00	20	0.25
Geom. mean		1.00		1.00		1.00

- The geometric mean is invariant under normalisation
- Rule: *arithmetic* mean for *raw* numbers, *geometric* mean for *normalised*!
 - [Fleming & Wallace, 1986]



Benchmark Suite Abuse

Benchmarking Crime: Select subset of suite

- Introduces bias
 - Point of suite is to cover a range of behaviour
 - Be wary of “typical results”, “representative subset”
- Sometimes unavoidable
 - some don't build on non-standard system or fail at run time
 - some may be too big for a particular system
 - eg, don't have file system and run from RAM disk...
- Treat with extreme care!
 - can only draw limited conclusion from results
 - cannot compare with (complete) published results
 - need to provide convincing explanation why only subset

Other SPEC crimes include use for multiprocessor scalability

- run multiple SPECS on different CPUs
- what does this prove?



Partial Data

- Frequently seen in I/O benchmarks:
 - Throughput is degraded by 10%
 - “Our super-reliable stack only adds 10% overhead”
 - This is almost certainly not true. Why?
 - Why is throughput degraded?
 - latency too high
 - CPU saturated?
 - Also, changes to drivers or I/O subsystem may affect scheduling
 - interrupt coalescence: do more with fewer interrupts
 - Throughput on its own is useless



Throughput Degradation

- Scenario: Network driver or protocol stack
 - New driver reduces throughput by 10% — why?
 - Compare:
 - 100 Mb/s, 100% CPU vs 90 Mb/s, 100% CPU
 - 100 Mb/s, 20% CPU vs 90 Mb/s, 40% CPU
 - Correct figure of merit is *processing cost per unit of data*
 - Proportional to *CPU load divided by throughput*
 - Correct overhead calculation:
 - 10 µs/kb vs 11 µs/kb: *10% overhead*
 - 2 µs/kb vs 4.4 µs/kb: *120% overhead*

Benchmarking crime: Show throughput degradation only

- ... and pretend this represents total overhead



Overview

- Performance
- Benchmarking
- **Profiling**
- Performance analysis



Profiling

- Run-time collection of execution statistics
 - *invasive (requires some degree of instrumentation)*
 - *unless use hardware debugging tools or cycle-accurate simulators*
 - *therefore affects the execution it's trying to analyse*
 - *good profiling approaches minimise this interference*
- Use to identify parts of system where optimisation provides most benefit
- Complementary to microbenchmarks
- Example: gprof
 - *compiles tracing into code, to record call graph*
 - *uses statistical sampling:*
 - *on each timer tick record program counter*
 - *post execution translate this into execution-time share*



Gprof example output

```
Each sample counts as 0.01 seconds.
% cumulative self      self      total
time seconds seconds  calls  ms/call  ms/call  name
33.34      0.02      0.02    7208    0.00     0.00   open
16.67      0.03      0.01     244    0.04     0.12  offtime
16.67      0.04      0.01      8     1.25     1.25  memccpy
16.67      0.05      0.01      7     1.43     1.43  write
16.67      0.06      0.01      1     0.00     0.00  mcount
0.00      0.06      0.00     236    0.00     0.00  tzset
0.00      0.06      0.00     192    0.00     0.00  tolower
0.00      0.06      0.00     47     0.00     0.00  strlen
0.00      0.06      0.00     45     0.00     0.00  strchr
0.00      0.06      0.00      1     0.00    50.00  main
0.00      0.06      0.00      1     0.00     0.00  memcpy
0.00      0.06      0.00      1     0.00    10.11  print
0.00      0.06      0.00      1     0.00     0.00  profil
0.00      0.06      0.00      1     0.00    50.00  report
```

Source: <http://sourceware.org/binutils/docs-2.19/gprof>



Gprof example output (2)

```
granularity: each sample hit covers 2 byte(s) for 20.00% of 0.05 seconds

index % time    self  children   called    name
-----
[1]  100.0    0.00    0.05        1/1    <spontaneous>
      0.00    0.05        1/1    start [1]
      0.00    0.00        1/2    main [2]
      0.00    0.00        1/1    on_exit [28]
      0.00    0.00        1/1    exit [59]
-----
[2]  100.0    0.00    0.05        1/1    start [1]
      0.00    0.05        1/1    main [2]
      0.00    0.05        1/1    report [3]
-----
[3]  100.0    0.00    0.05        1/1    main [2]
      0.00    0.05        1/1    report [3]
      0.00    0.03        8/8    timelocal [6]
      0.00    0.01        1/1    print [9]
      0.00    0.01        9/9    fgets [12]
```

Source: <http://sourceware.org/binutils/docs-2.19/gprof>



Profiling

- Run-time collection of execution statistics
 - invasive (requires some degree of instrumentation)
 - therefore affects the execution it's trying to analyse
 - good profiling approaches minimise this interference
- Use to identify parts of system where optimisation provides most benefit
- Complementary to microbenchmarks
- Example: gprof
 - compiles tracing into code, to record call graph
 - uses statistical sampling:
 - on each timer tick record program counter
 - post execution translate this into execution-time share
- Example: oprof
 - collects hardware performance-counter readings
 - works for kernel and apps
 - minimal overhead



oprof example output

```
$ oprofile --exclude-dependent
CPU: PIII, speed 863.195 MHz (estimated)
Counted CPU_CLK_UNHALTED events (clocks processor is not halted) with a ...
450385 75.6634 cclplus
60213 10.1156 lyx
29313 4.9245 XFree86
11633 1.9543 as
10204 1.7142 oprofiled
7289 1.2245 vmlinux
7066 1.1871 bash
6417 1.0780 oprofile
6397 1.0747 vim
3027 0.5085 wineserver
1165 0.1957 kdeinit
832 0.1398 wine
...
```

Performance counter used

Profiler

Source: <http://oprofile.sourceforge.net/examples/>



oprof example output

```
$ oprofile
CPU: PIII, speed 863.195 MHz (estimated)
Counted CPU_CLK_UNHALTED events (clocks processor is not halted) with a ...
506605 54.0125 cclplus
450385 88.9026 cclplus
28201 5.5667 libc-2.3.2.so
27194 5.3679 vmlinux
677 0.1336 uhci_hcd
...
163209 17.4008 lyx
60213 36.8932 lyx
23881 14.6322 libc-2.3.2.so
21968 13.4600 libstdc++.so.5.0.1
13676 8.3794 libpthread-0.10.so
12988 7.9579 libfreetype.so.6.3.1
10375 6.3569 vmlinux
...
```

Source: <http://oprofile.sourceforge.net/examples/>



Performance Monitoring Unit (PMU)



- Collects certain *events* at run time
- Typically supports many events, small number of *event counters*
 - Events refer to hardware (micro-architectural) features
 - Typically relating to instruction pipeline or memory hierarchy
 - Dozens or hundreds
 - Counter can be bound to a particular event
 - Via some configuration register
 - Typically 2–4
 - OS can sample counters
 - Counters can trigger exception on exceeding threshold

Event Examples (ARM11)



Ev #	Definition	Ev #	Definition	Ev #	Definition
0x00	I-cache miss	0x0b	D-cache miss	0x22	...
0x01	Instr. buffer stall	0x0c	D-cache writeback	0x23	Funct. call
0x02	Data depend. stall	0x0d	PC changed by SW	0x24	Funct. return
0x03	Instr. micro-TLB miss	0x0f	Main TLB miss	0x25	Funct. ret. predict
0x04	Data micro-TLB miss	0x10	Ext data access	0x26	Funct. ret. mispred
0x05	Branch executed	0x11	Load-store unit stall	0x30	...
0x06	Branch mispredicted	0x12	Write-buffer drained	0x38	...
0x07	Instr. executed	0x13	Cycl FIQ disabled	0xff	Cycle counter
0x09	D-cache acc cachable	0x14	Cycl IRQ disabled		
0x0a	D-cache access any	0x20	...		

Overview



- Performance
- Benchmarking
- Profiling
- **Performance analysis**

Significance of Measurements



All measurements are subject to random errors

- Standard scientific approach: Many iterations, *collect statistics*
- Rarely done in systems work — why?
- Computer systems tend to be *highly deterministic*
 - Repeated measurements often give identical results
 - Main exception are experiments involving WANs
- However, it is dangerous to rely on this without checking!
 - Sometimes “random” fluctuations indicate *hidden parameters*

Benchmarking crime: results with no indication of significance

Non-criminal approach:

- Show at least standard deviation of your measurements
- ... or state explicitly it was below a certain value throughout
- Admit results are insignificant unless well-separated std deviations

How to Measure and Compare Performance



Bare-minimum statistics:

- At minimum report the mean (μ) and standard deviation (σ)
 - Don't believe any effect that is less than a standard deviation
 - 10.2 ± 1.5 is not significantly different from 11.5
 - Be highly suspicious if it is less than two standard deviations
 - 10.2 ± 0.8 may not be different from 11.5
- Be *very suspicious* if reproducibility is poor (i.e. σ is *not* small)
- *Distrust* standard deviations of small iteration counts
 - standard deviations are meaningless for small number of runs
 - ... but ok if effect $\gg \sigma$
 - The proper way to check significance of differences is Student's t-test!


How to Measure and Compare Performance



Bare-minimum stats are sometimes insufficient

- Eg: Old: $\mu = 18$ sec, New: $\mu = 6$ sec

Cumulative distribution function (CDF)

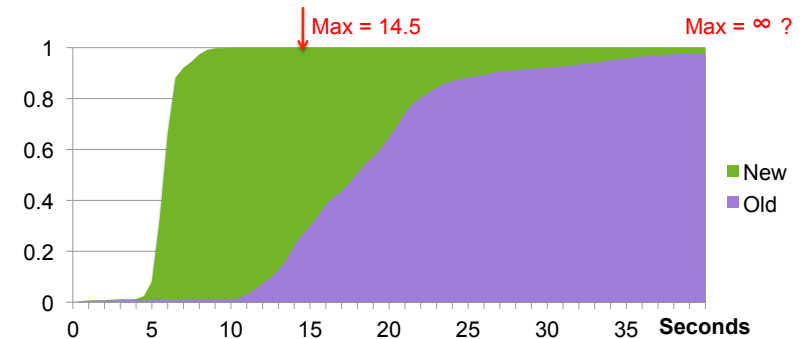

Courtesy Robert Grimm

How to Measure and Compare Performance



Obtaining meaningful execution times:


- Make sure execution times are long enough
 - What is the granularity of your time measurements?
 - make sure the effect you're looking for is much bigger
 - many repetitions won't help if your effect is dominated by clock resolution
 - do many repetitions in a tight loop if necessary

Example: gzip from SPEC CPU2000



Observations?

- First iteration is special
 - Warm up caches to get reliable data
- Clock resolution 50ms
 - will not be able to observe any effects that account for less than 0.1 sec

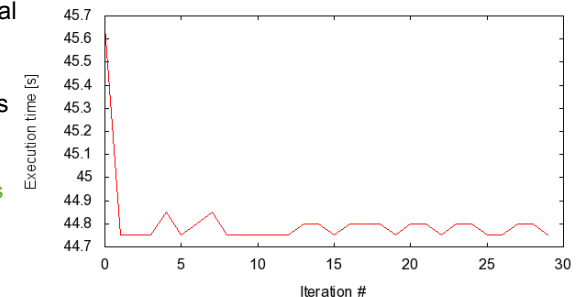

Lesson?

- Need a mental model of the system
 - Here: repeated runs should give the same result
- Find reason (hidden parameters) if results do not comply!

How to Measure and Compare Performance



Noisy data:

- sometimes it isn't feasible to get a "clean" system
 - e.g. running apps on a "standard configuration"
 - this can lead to very noisy results, large standard deviations

Possible ways out:

- ignoring lowest and highest result
- taking the floor of results
 - makes only sense if you're looking for minimum
 - but beware of difference-taking!

Both of these are dangerous, use with great care!

- Only if you know what you are doing
 - need to give a convincing explanation of why this is justified
- Only if you explicitly state what you've done in your paper/report

How to Measure and Compare Performance



Check outputs!

- Benchmarks must check results are correct!
 - Sometimes things are very fast because no work is done!
 - Beware of compiler optimisations, implementation bugs
- Sometimes checking all results is infeasible
 - eg takes too long, checking dominates effect you're looking for
 - check at least *some* runs
 - run same setup with checks en/disabled

How to Measure and Compare Performance



Vary inputs!

- Easy to produce low standard deviations by using identical runs
 - but this is often not representative
 - can lead to unrealistic caching effects
 - especially in benchmarks involving I/O
 - disks are notorious for this
 - controllers do caching, pre-fetching etc out of control of OS
- Good ways to achieve variations:
 - time stamps for randomising inputs (but see below!)
 - varying order:
 - forward vs backward
 - sequential with increasing strides
 - random access
 - best is to use combinations of the above, to ensure that results are sane

How to Measure and Compare Performance



Ensure runs are comparable and reproducible:

- Avoid true randomness!
 - tends to lead to different execution paths or data access patterns
 - makes results non-reproducible
 - makes impossible to fairly compare results from different implementations!
 - exceptions exist
 - crypto algorithms are designed to have execution path independent of inputs
- Pseudo-random is good for benchmarking
 - reproducible sequence of "random" inputs
 - capture sequence and replay for each run
 - use pseudo-random generator with same seed

How to Measure and Compare Performance



Environment

- Ensure system is quiescent
 - to the degree possible, turn off any unneeded functionality
 - run Unix systems in single-user mode
 - turn off wireless, disconnect networks, put disk to sleep, etc
 - Be aware of self-interference
 - eg logging benchmark results may wake up disk...
- Ensure compared runs start from the same system state (as far as possible)
 - back-to-back processes may *not* find the system in the same state

Real-World Example



Benchmark:

- 300.two1f from SPEC CPU2000 suite

Platform:

- Dell Latitude D600
 - Pentium M @ 1.8GHz
 - 32KiB L1 cache, 8-way
 - 1MiB L2 cache, 8-way
 - DDR memory @ effective 266MHz
- Linux kernel version 2.6.24


Methodology:

- Multiple identical runs for statistics...

two1f on Linux: What's going on?




20% variation in execution time between "identical" runs!

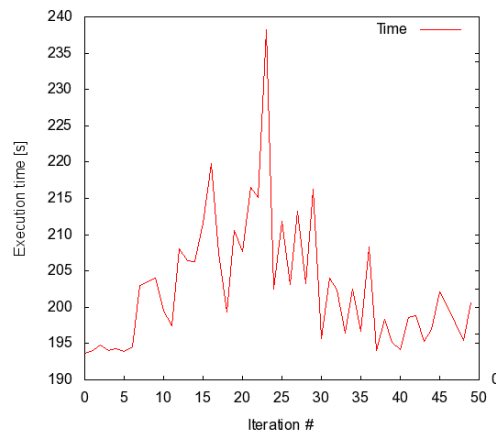

two1f on Linux:




Performance counters are your friends!

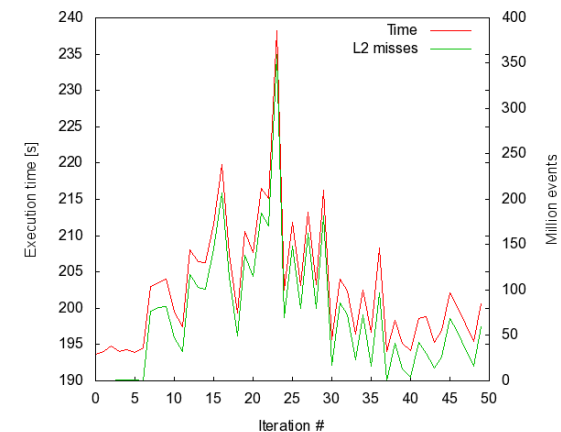

twolf on Linux:

Subtract 221 cy (123ns) for each cache miss

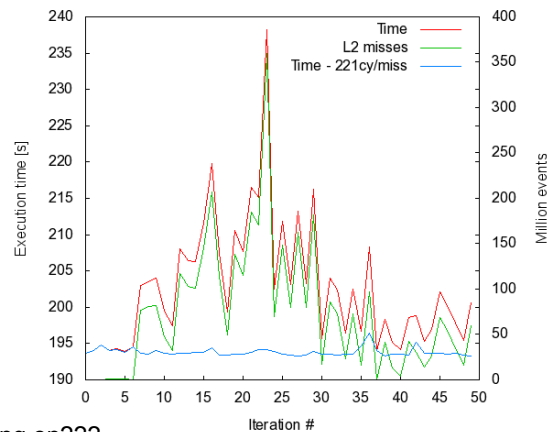

What's going on???

twolf on Linux: Lessons?

- Pointer to problem was standard deviation
 - σ for "twolf" was much higher than normal for SPEC programs
- Standard deviation did not conform to mental model
 - Shows the value of verifying that model holds
 - Correcting model improved results dramatically
- Shows danger of assuming reproducibility without checking!
- Facit: **Always** collect and analyse standard deviations!

How to Measure and Compare Performance

Vary only one thing at a time!

- Typical example: used a combination of techniques to improve system
 - what can you learn from a 20% overall improvement?
- Need to run sequence of evaluations, looking at individual changes
 - identify contribution and relevance
 - understand how they combine to an overall effect
 - they may enhance or counter-balance each other
 - make sure you understand what's going on!!!!

Record all configurations and data!

- May have overlooked something at first
- May develop better model later
 - could be much faster to re-analyse existing data than re-run all benchmarks

How to Measure and Compare Performance

Measure as directly as possible:

- Eg, when looking at effects of pinning TLB entries
 - don't just look at overall execution time (combination of many things)
 - use performance counter to compare
 - TLB misses
 - cache misses (from page table reloads)
 - ...
- Cannot always measure directly
 - eg, actual TLB-miss cost not known
 - extrapolate by artificially reducing TLB size
 - eg by pinning useless entries

How to Measure and Compare Performance



Avoid incorrect conclusions from pathological cases

- Typical cases:
 - sequential access optimised by underlying hardware/disk controller...
 - potentially massive differences between sequentially up/down
 - pre-fetching by processor, disk cache
 - random access may be an unrealistic scenario that destroys performance
 - for file systems
 - powers of two may be particularly good or particularly bad for strides
 - often good for cache utilisation
 - minimise number of cache lines used
 - often bad for cache utilisation
 - maximise cache conflicts
 - similarly just-off powers (2^n-1 , 2^n+1)
- What is “pathological” depends a lot on what you're measuring
 - e.g. caching in underlying hardware


How to Measure and Compare Performance



Use a model

- You need a (mental or explicit) model of the behaviour of your system
 - benchmarking should aim to support or disprove that model
 - need to think about this in selecting data, evaluating results
 - eg: I/O performance dependent on FS layout, caching in controller...
 - cache sizes (HW & SW caches)
 - buffer sizes vs cache size
- Should tell you the size of what to expect
 - you should understand that a 2ns cache miss penalty can't be right

Example: Memory Copy

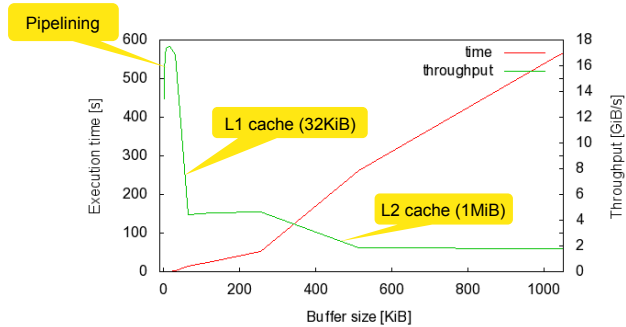

How to Measure and Compare Performance



Understand your results!

- Results you don't understand will almost certainly hide a problem
 - Never publish results you don't understand
 - chances are the reviewers understand them, and will reject the paper
 - maybe worse: someone at the conference does it
 - this will make you look like an idiot
 - of course, if this happens you *are* an idiot!

Loop and Timing Overhead



Ensure that measuring overhead does not affect results:

- Cost of accessing clock may be significant
- Loop overhead may be significant
- Stub overhead may be significant

Approaches:

- May iterations in tight loop
- Measure and eliminate timer overhead
- Measure and eliminate loop overhead
- Eliminate effect of any instrumentation code

Eliminating Overhead



```
t0 = time();
for (i=0; i<MAX; i++) {
    asm(nop);
}
t1 = time();
for (i=0; i<MAX; i++) {
    asm(syscall);
}
t2 = time();
printf("Cost is %dus\n", (t2-2*t1+t0)*1000000/MAX);
```


Beware of compiler optimizations!

Relative vs Absolute Data



From a real paper (IEEE CCNC'09):

- No data other than this figure
- No figure caption
- Only explanation in text:
 - "The L4 overhead compared to VLX ranges from a 2x to 20x factor depending on the Linux system call benchmark"
- No definition of "overhead factor"
- No native Linux data



Benchmarking crime: Relative numbers only

- Makes it impossible to check whether results make sense
- How hard did they try to get the competitor system to perform?
 - Eg, did they run it with default build parameters (debugging enabled)?

Benchmarking Ethics



- Do compare with published competitor data, but...
 - Ensure comparable setup
 - Same hardware (or *convincing* argument why it doesn't matter)
 - you may be looking at an aspect the competitor didn't focus on
 - eg: they designed for large NUMA, you optimise for embedded
- Be ultra-careful when benchmarking competitor's system yourself
 - Are you sure you're running the competitor system optimally?
 - you could have the system mis-configured (eg debugging enabled)
 - Do your results match their (published or else) data?
 - Make sure you understand exactly what is going on!
 - Eg use profiling/tracing to understand source of difference
 - Explain it!

Benchmarking crime: Unethical benchmarking of competitor

- Lack of care is unethical too!

Other Ways to Cheat With Benchmarks

- Benchmark-specific optimisations
 - Popular with compiler-writers
 - Recognise particular benchmark
 - Insert BM-specific hand-optimised code
- End-user benefit: Zero
- Rarely an issue in OS area



What Is “Good”?

- Easy if there are established and published benchmarks
 - Eg your improved algorithm beats best published Linux data by x%
 - But are you sure that it doesn't lead to worse performance elsewhere?
 - important to run complete benchmark suites
 - think of everything that could be adversely effected, and *measure!*
- Tricky if no published standard
 - Can run competitor/incumbent
 - eg run lmbench, kernel compile etc on your modified Linux and standard Linux
 - but be *very careful* to avoid running the competitor sub-optimally!
 - Establish performance limits
 - ie compare against optimal scenario
 - micro-benchmarks or profiling can be highly valuable here!



Real-World Example: Virtualization Overhead

- Symbian null-syscall microbenchmark:
 - native: 0.24µs, virtualized: 0.79µs
 - 230% overhead — good or bad?
- ARM11 processor runs at 368 MHz:
 - Native: 0.24µs = 93 cy
 - Virtualized: 0.79µs = 292 cy
 - Overhead: 0.55µs = 199 cy
 - Cache-miss penalty ≈ 20 cy
- Model:
 - native: 2 mode switches, 0 context switches, 1 x save+restore state
 - virtualized: 4 mode switches, 2 context switches, 3 x save+restore state
 - expected overhead?



Performance Counters are Your Friends!

Good or bad?

Counter	Native	Virtualized	Difference
Branch miss-pred	1	1	0
D-cache miss	0	0	0
I-cache miss	0	1	1
D-µTLB miss	0	0	0
I-µTLB miss	0	0	0
Main-TLB miss	0	0	0
Instructions	30	125	95
D-stall cycles	0	27	27
I-stall cycles	0	45	45
Total Cycles	93	292	199



More of the Same...



First step: improve representation!

Benchmark	Native	Virtualized
Context switch [1/s]	615046	444504
Create/close [μs]	11	15
Suspend [10ns]	81	154

Benchmark	Native	Virtualized	Difference	Overhead
Context switch [μs]	1.63	2.25	0.62	39%
Create/close [μs]	11	15	4	36%
Suspend [μs]	0.81	1.54	0.73	90%

More of the Same...



Then represent the overheads in the right units...

Benchmark	Native	Virt.	Diff [μs]	Diff [cy]	# sysc	Cy/sysc
Context switch [μs]	1.63	2.25	0.62	230	1	230
Create/close [μs]	11	15	4	1472	2	736
Suspend [μs]	0.81	1.54	0.73	269	1	269

Further analysing the create/close benchmark:

- guest dis/enables interrupts 22 times
 - extra instructions required to manipulate virtual interrupt flag
 - account for most of extra overhead

Yet Another One...



Benchmark	Native [μs]	Virt. [μs]	Overhead
TDes16_Num0	1.2900	1.2936	0.28%
TDes16_RadixHex1	0.7110	0.7129	0.27%
TDes16_RadixDecimal2	1.2338	1.2373	0.28%
TDes16_Num_RadixOctal3	0.6306	0.6324	0.28%
TDes16_Num_RadixBinary4	1.0088	1.0116	0.27%
TDesC16_Compare5	0.9621	0.9647	0.27%
TDesC16_CompareF7	1.9392	1.9444	0.27%
TdesC16_MatchF9	1.1060	1.1090	0.27%

- Note: these are purely user-level operations!
 - What's going on?

Yet Another One...



Benchmark	Native [μs]	Virt. [μs]	Overhead	Per tick
TDes16_Num0	1.2900	1.2936	0.28%	2.8 μs
TDes16_RadixHex1	0.7110	0.7129	0.27%	2.7 μs
TDes16_RadixDecimal2	1.2338	1.2373	0.28%	2.8 μs
TDes16_Num_RadixOctal3	0.6306	0.6324	0.28%	2.8 μs
TDes16_Num_RadixBinary4	1.0088	1.0116	0.27%	2.7 μs
TDesC16_Compare5	0.9621	0.9647	0.27%	2.7 μs
TDesC16_CompareF7	1.9392	1.9444	0.27%	2.7 μs
TdesC16_MatchF9	1.1060	1.1090	0.27%	2.7 μs

Note: these are purely user-level operations!

- What's going on?
- Timer tick is 1000 Hz
- Overhead from virtualizing timer interrupt!
- Good or bad?

Lessons Learned



- Ensure stable results
 - repeat for good statistics
 - investigate source of apparent randomness
- Have a model of what you expect
 - investigate if behaviour is different
 - unexplained effects are likely to indicate problems — don't ignore them!
- Tools are your friends
 - performance counters
 - simulators
 - traces
 - spreadsheets

Annotated list of benchmarking crimes: <http://www.gernot-heiser.org/>