UNIX File Management



UNIX File Management

- We will focus on two types of files
 - Ordinary files (stream of bytes)
 - Directories
- and discuss other types later
 - Character devices
 - Block devices
 - Named pipes
 - Sockets
 - Symbolic links



UNIX index node (inode)

- Each file is represented by an Inode
- Inode contains all of a file's metadata
 - Access rights, owner, accounting info
 - (partial) block index table of a file
- Each inode has a unique number (within a partition)
 - System oriented name
 - Try 'ls –i' on Unix (Linux)
- Directories map file names to inode numbers
 - Map human-oriented to system-oriented names
 - Mapping can be many-to-one
 - Hard links



mode uid gid atime ctime mtime size block count reference count direct blocks (12)single indirect double indirect triple indirect

- Mode
 - Type
 - Regular file or directory
 - Access mode
 - rwxrwxrwx
- Uid
 - User ID
- Gid
 - Group ID



mode uid gid atime ctime mtime size block count reference count direct blocks (12)single indirect double indirect triple indirect

- atime
 - Time of last access
- ctime
 - Time when file was created
- mtime
 - Time when file was last modified

mode uid gid atime ctime mtime size block count reference count direct blocks (12)single indirect double indirect triple indirect


- Size
 - Size of the file in bytes
- Block count
 - Number of disk blocks used by the file.
- Note that number of blocks can be much less than expected given the file size
 - Files can be sparsely populated
 - E.g. write(f,"hello"); Iseek(f, 1000000); write(f, "world");
 - Only needs to store the start an end of file, not all the empty blocks in between.
 - Size = 1000005
 - Blocks = 2 + overheads



mode uid gid atime ctime mtime size block count reference count direct blocks (12) 40,58,26,8,12, 44,62,30,10,42,... single indirect double indirect

Inode Contents

- Direct Blocks
 - Block numbers of first 10 blocks in the file
 - Most files are small
 - We can find blocks of file directly from the inode

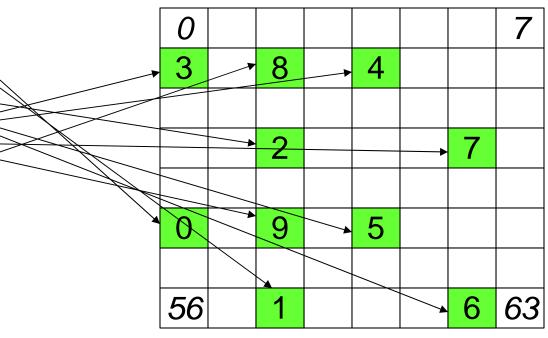



triple indirect


Problem

- How do we store files greater than 12 blocks in size?
 - Adding significantly more direct entries in the inode results in many unused entries most of the time.



mada
mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12) 40,58,26,8,12, 44,62,30,10,42,
single indirect: 32
double indirect
triple indirect

- Single Indirect Block
 - Block number of a block containing block numbers
 - In this case 8

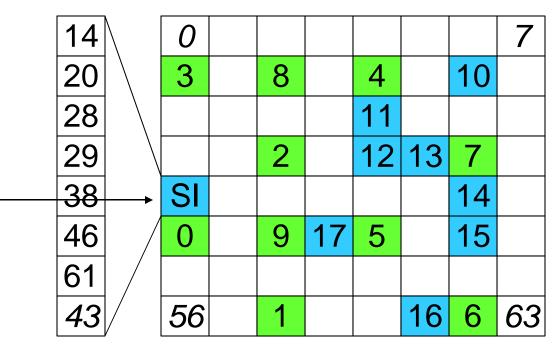



Single Indirection


- Requires two disk access to read
 - One for the indirect block; one for the target block
- Max File Size
 - In previous example
 - 12 direct + 8 indirect = 20 block file
 - A more realistic example
 - Assume 1Kbyte block size, 4 byte block numbers
 - 12 * 1K + 1K/4 * 1K = 268 Kbytes
- For large majority of files (< 268 K), only one or two accesses required to read any block in file.



mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12) 40,58,26,8,12, 44,62,30,10,42
single indirect: 32
double indirect
triple indirect

- Double Indirect Block
 - Block number of a block containing block numbers of blocks containing block numbers
- Triple Indirect
 - Block number of a block containing block numbers of blocks containing block numbers of blocks containing block numbers

Unix Inode Block Addressing Scheme

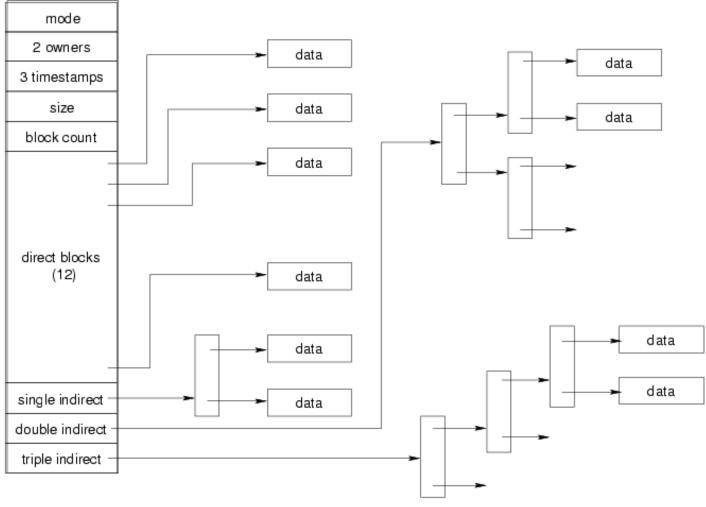



Max File Size

- Assume 4 bytes block numbers and 1K blocks
- The number of addressable blocks
 - Direct Blocks = 12
 - Single Indirect Blocks = 256
 - Double Indirect Blocks = 256 * 256 = 65536
 - Triple Indirect Blocks = 256 * 256 * 256 = 16777216
- Max File Size
 - − 12 + 256 + 65536 + 16777216 = 16843020 ~ 16 GB

Some Best and Worst Case Access Patterns

- To read 1 byte
 - Best:
 - 1 access via direct block
 - Worst:
 - 4 accesses via the triple indirect block
- To write 1 byte
 - Best:
 - 1 write via direct block (with no previous content)
 - Worst:
 - 4 reads (to get previous contents of block via triple indirect) +
 1 write (to write modified block back)



Worst Case Access Patterns with Unallocated Indirect Blocks

- Worst to write 1 byte
 - 4 writes (3 indirect blocks; 1 data)
 - 1 read, 4 writes (read-write 1 indirect, write 2; write 1 data)
 - 2 reads, 3 writes (read 1 indirect, read-write 1 indirect, write 1;
 write 1 data)
 - 3 reads, 2 writes (read 2, read-write 1; write 1 data)
- Worst to read 1 byte
 - If reading writes an zero-filled block on disk
 - Worst case is same as write 1 byte
 - If not, worst-case depends on how deep the current indirect block tree is.



Inode Summary

- The inode contains the on disk data associated with a file
 - Contains mode, owner, and other bookkeeping
 - Efficient random and sequential access via indexed allocation
 - Small files (the majority of files) require only a single access
 - Larger files require progressively more disk accesses for random access
 - Sequential access is still efficient
 - Can support really large files via increasing levels of indirection



Where/How are Inodes Stored?

Boot	Super	Inode	Doto Plooles
Block	Block	Array	Data Blocks

- System V Disk Layout (s5fs)
 - Boot Block
 - contain code to bootstrap the OS
 - Super Block
 - Contains attributes of the file system itself
 - e.g. size, number of inodes, start block of inode array, start of data block area, free inode list, free data block list
 - Inode Array
 - Data blocks



Some problems with s5fs

- Inodes at start of disk; data blocks at the end
 - Long seek times
 - Must read inode before reading data blocks
- Only one superblock
 - Corrupt the superblock and entire file system is lost
- Block allocation suboptimal
 - Consecutive free block list created at FS format time
 - Allocation and de-allocation eventually randomises the list resulting the random allocation
- Inodes allocated randomly
 - Directory listing results in random inode access patterns



Berkeley Fast Filesystem (FFS)

- Historically followed s5fs
 - Addressed many limitations with s5fs
 - Linux mostly similar, so we will focus on Linux



The Linux Ext2 File System

- Second Extended Filesystem
 - Evolved from Minix filesystem (via "Extended Filesystem")

Features

- Block size (1024, 2048, and 4096) configured as FS creation
- Pre-allocated inodes (max number also configured at FS creation)
- Block groups to increase locality of reference (from BSD FFS cylinder groups)
- Symbolic links < 60 characters stored within inode
- Main Problem: unclean unmount ∠e2fsck
 - Ext3fs keeps a journal of (meta-data) updates
 - Journal is a file where updates are logged
 - Compatible with ext2fs



Layout of an Ext2 Partition

Boot	Block Group		Block Group
Block	0	••••	n

- Disk divided into one or more partitions
- Partition:
 - Reserved boot block,
 - Collection of equally sized block groups
 - All block groups have the same structure



Layout of a Block Group

Super Block	Group Descriptors	Data Block Bitmap	Inode Bitmap	Inode Table	Data blocks
1 blk	n blks	1 blk	1 blk	m blks	k blks

- Replicated super block
 - For e2fsck
- Group descriptors
- Bitmaps identify used inodes/blocks
- All block have the same number of data blocks
- Advantages of this structure:
 - Replication simplifies recovery
 - Proximity of inode tables and data blocks (reduces seek time)



Superblocks

- Size of the file system, block size and similar parameters
- Overall free inode and block counters
- Data indicating whether file system check is needed:
 - Uncleanly unmounted
 - Inconsistency
 - Certain number of mounts since last check
 - Certain time expired since last check
- Replicated to provide redundancy to add recoverability



Group Descriptors

- Location of the bitmaps
- Counter for free blocks and inodes in this group
- Number of directories in the group



Performance considerations

- EXT2 optimisations
 - Read-ahead for directories
 - For directory searching
 - Block groups cluster related inodes and data blocks
 - Pre-allocation of blocks on write (up to 8 blocks)
 - 8 bits in bit tables
 - Better contiguity when there are concurrent writes
- FFS optimisations
 - Files within a directory in the same group



Thus far...

- Inodes representing files laid out on disk.
- Inodes are referred to by number!!!
 - How do users name files? By number?
 - Try Is –i to see how useful inode numbers are....




inode rec_len name_len type name

- Directories are files of a special type
 - is a file of special format, managed by the kernel, that uses most of the same machinery to implement it
 - Inodes, etc...
- Directories translate names to inode numbers
- Directory entries are of variable length
- Entries can be deleted in place
 - inode = 0
 - Add to length of previous entry
 - use null terminated strings for names




- "f1" = inode 7
- "file2" = inode 43
- "f3" = inode 85

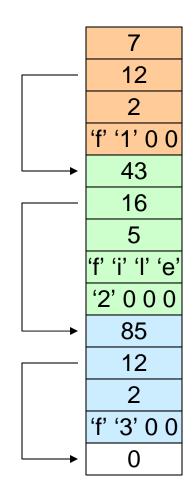

Inode No
Rec Length
Name Length
Name



- Note that inodes can have more than one name
 - Called a Hard Link
 - Inode (file) 7 has three names
 - "f1" = inode 7
 - "file2" = inode 7
 - "f3" = inode 7

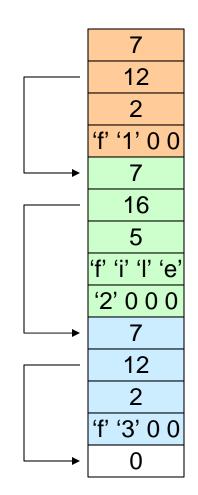


Inode No
Rec Length
Name Length
Name



mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (10) 40,58,26,8,12, 44,62,30,10,42
single indirect: 32
double indirect
triple indirect

- We can have many name for the same inode.
- When we delete a file by name, i.e. remove the directory entry (link), how does the file system know when to delete the underlying inode?
 - Keep a reference count in the inode
 - Adding a name (directory entry) increments the count
 - Removing a name decrements the count
 - If the reference count == 0, then we have no names for the inode (it is unreachable), we can delete the inode (underlying file or directory)


- Deleting a filename
 - rm file2

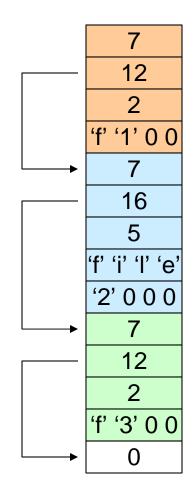

Inode No
Rec Length
Name Length
Name



- Deleting a filename
 - rm file2
- Adjust the record length to skip to next valid entry

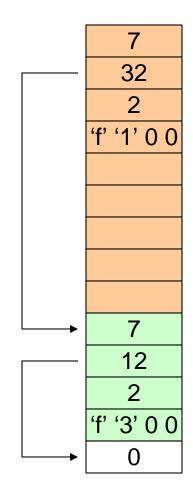

Inode No
Rec Length
Name Length
Name



Kernel File-related Data Structures and Interfaces

- We have reviewed how files and directories are stored on disk
- We know the UNIX file system-call interface
 - open, close, read, write, Iseek,.....

What is in between?



What do we need to keep track of?

- File descriptors
 - Each open file has a file descriptor
 - Read/Write/Iseek/.... use them to specify which file to operate on.
- File pointer
 - Determines where in the file the next read or write is performed
- Mode
 - Was the file opened read-only, etc....



An Option?

 Use inode numbers as file descriptors and add a file pointer to the inode


Problems

- What happens when we concurrently open the same file twice?
 - We should get two separate file descriptors and file pointers....



An Option?


- Single global open file array
 - fd is an index into the array
 - Entries contain file pointer and pointer to an inode

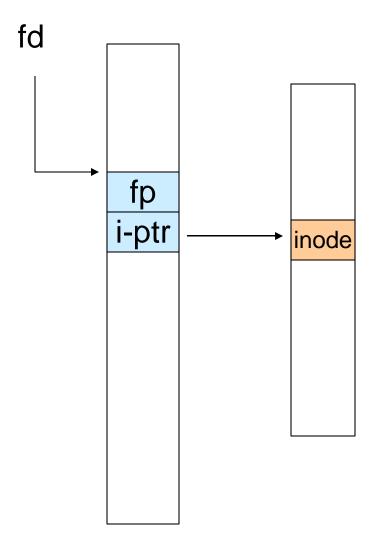



Issues

- File descriptor 1 is stdout
 - Stdout is
 - console for some processes
 - A file for others
- Entry 1 needs to be different per process!

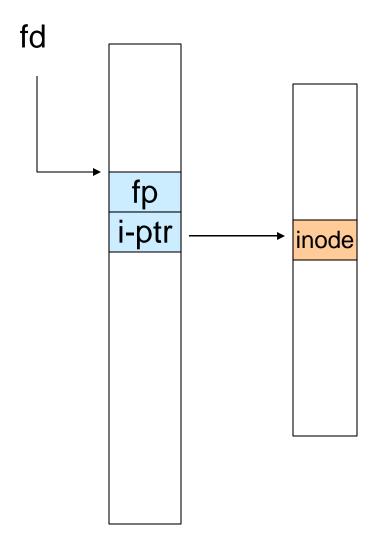




Per-process File Descriptor Array

 Each process has its own open file array

- Contains fp, i-ptr etc.


Fd 1 can be any inode for each process (console, log file).

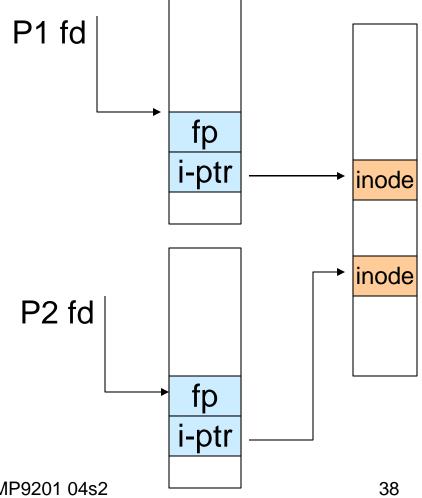



Issue


- Fork
 - Fork defines that the child shares the file pointer with the parent
- Dup2
 - Also defines the file descriptors share the file pointer
- With per-process table, we can only have independent P2 fd file pointers
 - Even when accessing the same file

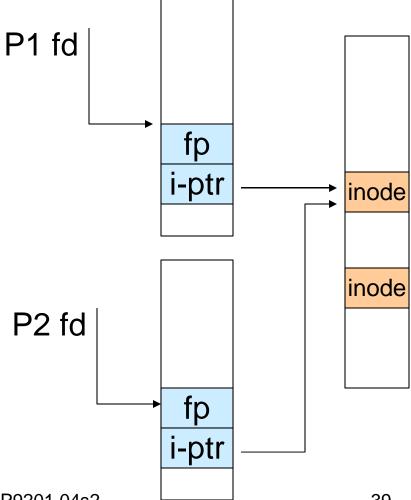




Per-Process *fd* table with global open file table

- Per-process file descriptor array
 - Contains pointers to open file table entry
- Open file table array
 - Contain entries with a fp and pointer to an inode.
- Provides
 - Shared file pointers if required
 - Independent file pointers if required
- Example:
 - All three fds refer to the same file, two share a file pointer, one has an independent file pointer

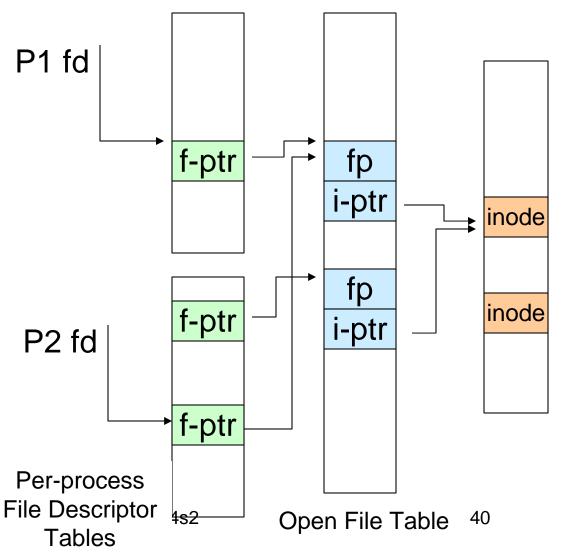

Per-Process *fd* table with global open file table

 Used by Linux and most other Unix operating systems

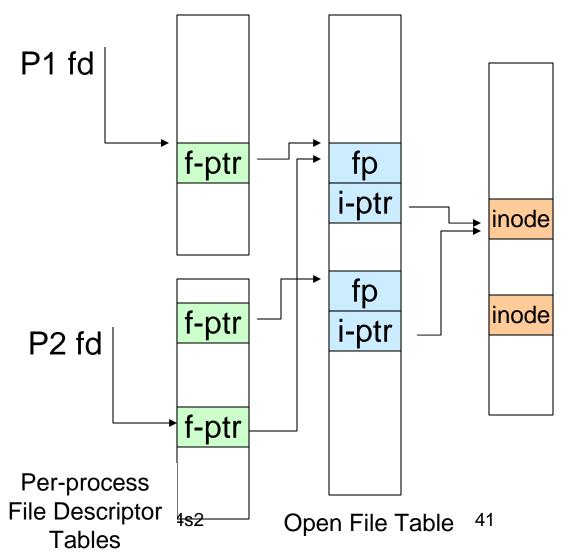

Older Systems only had a single file system

- They had file system specific open, close, read, write, ... calls.
- The open file table pointed to an in-memory representation of the inode
 - inode format was specific to the file system used (s5fs, Berkley FFS, etc)
- However, modern systems need to support many file system types
 - ISO9660 (CDROM), MSDOS (floppy), ext2fs, tmpfs



Supporting Multiple File Systems

Alternatives

- Change the file system code to understand different file system types
 - Prone to code bloat, complex, non-solution
- Provide a framework that separates file system independent and file system dependent code.
 - Allows different file systems to be "plugged in"
 - File descriptor, open file table and other parts of the kernel can be independent of underlying file system




Virtual File System (VFS)

- Provides single system call interface for many file systems
 - E.g., UFS, Ext2, XFS, DOS, ISO9660,...
- Transparent handling of network file systems
 - E.g., NFS, AFS, CODA
- File-based interface to arbitrary device drivers (/dev)
- File-based interface to kernel data structures (/proc)
- Provides an indirection layer for system calls
 - File operation table set up at file open time
 - Points to actual handling code for particular type
 - Further file operations redirected to those functions




VFS architecture

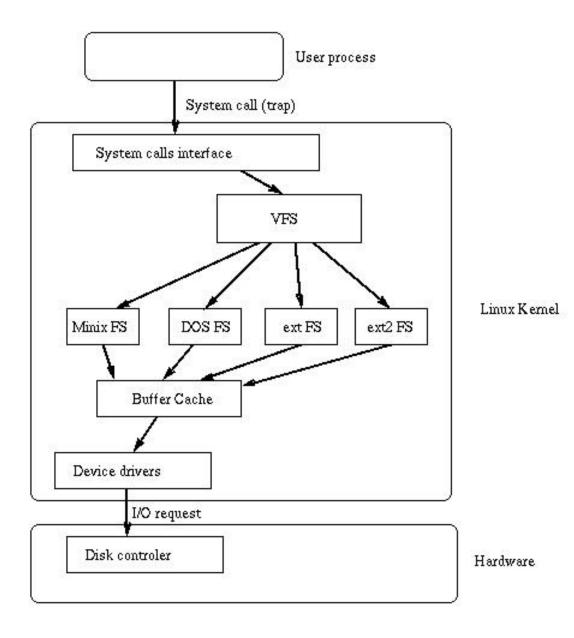



The file system independent code deals with vfs and vnodes

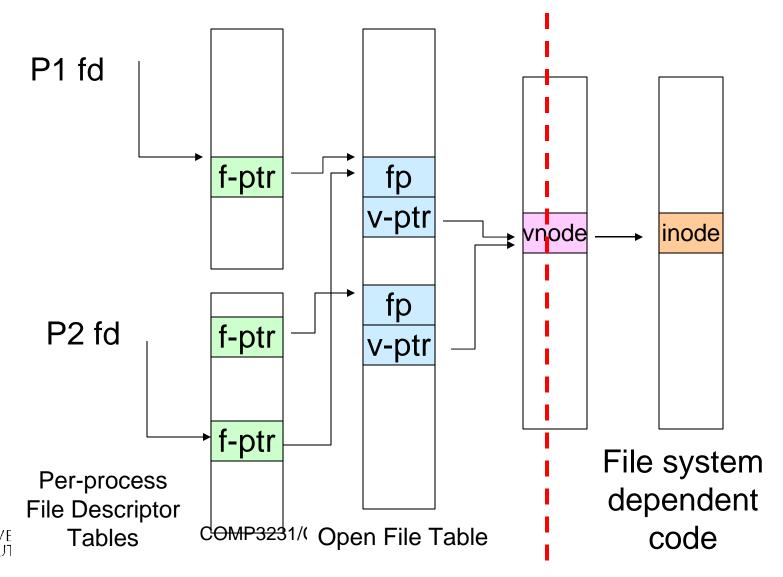



VFS Interface

Reference

- S.R. Kleiman., "Vnodes: An Architecture for Multiple File System Types in Sun Unix," USENIX Association: Summer Conference Proceedings, Atlanta, 1986
- Linux and OS/161 differ slightly, but the principles are the same
- Two major data types
 - vfs
 - Represents all file system types
 - Contains pointers to functions to manipulate each file system as a whole (e.g. mount, unmount)
 - Form a standard interface to the file system

vnode

- Represents a file (inode) in the underlying filesystem
- Points to the real inode
- Contains pointers to functions to manipulate files/inodes (e.g. open, close, read, write,...)



A look at OS/161's VFS

Force the

passed to vfs_mount

The OS161's file system type filesystem to Represents interface to a mounted filesystem flush its content to disk struct fs { Retrieve the volume name int (*fs sync)(struct fs *); const char *(*fs getvolname)(struct fs *); struct vnode *(*fs getroot)(struct fs *); Retrieve the vnode int (*fs unmount)(struct fs *); associates with the root of the filesystem void *fs data; **}**; Unmount the filesystem Note: mount called via function ptr



Priv. file system

specific data

```
Count the number of "references" to this vnode
```

Vnode

Number of times vnode is currently open

```
struct vnode {
                                             Lock for mutual
                                               exclusive •
  int vn refcount;
                                               access to
                                                counts
  int vn_opencount;
  struct lock *vn countlock;
                                               Pointer to FS
  struct fs *vn fs;
                                Pointer to FS
                                                containing
  void *vn data;
                                 specific
                                                the vnode
                                vnode data
                                (e.g. inode)
```


const struct vnode_ops *vn_ops;



};

to functions operating on vnodes

Access Vnodes via Vnode Operations

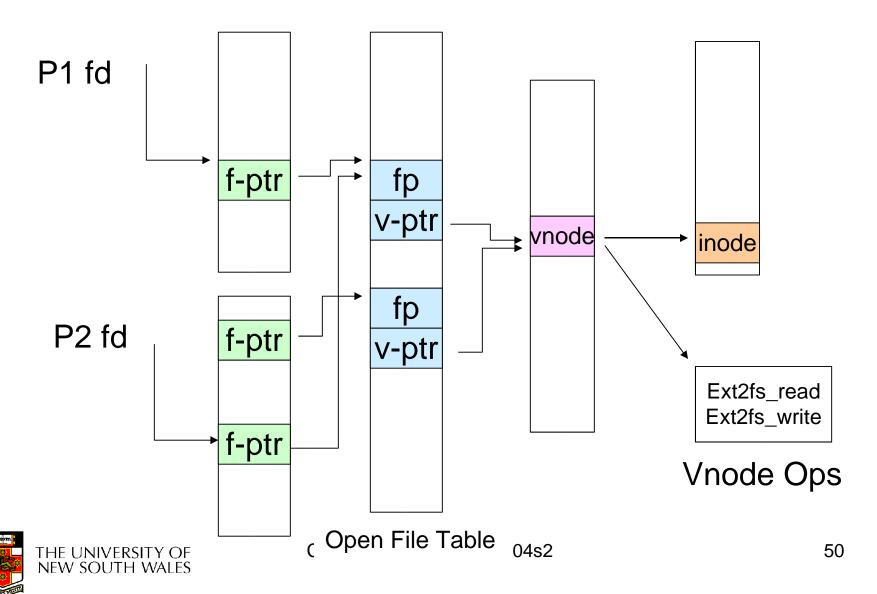

Vnode Ops

```
struct vnode_ops {
                                 /* should always be VOP MAGIC */
   unsigned long vop magic;
   int (*vop open)(struct vnode *object, int flags from open);
   int (*vop close)(struct vnode *object);
   int (*vop_reclaim)(struct vnode *vnode);
   int (*vop read)(struct vnode *file, struct uio *uio);
   int (*vop readlink)(struct vnode *link, struct uio *uio);
   int (*vop getdirentry)(struct vnode *dir, struct uio *uio);
   int (*vop write)(struct vnode *file, struct uio *uio);
   int (*vop_ioctl)(struct vnode *object, int op, userptr_t data);
   int (*vop stat)(struct vnode *object, struct stat *statbuf);
   int (*vop gettype)(struct vnode *object, int *result);
   int (*vop_tryseek)(struct vnode *object, off_t pos);
   int (*vop fsync)(struct vnode *object);
   int (*vop mmap)(struct vnode *file /* add stuff */);
   int (*vop truncate)(struct vnode *file, off t len);
   int (*vop namefile)(struct vnode *file, struct uio *uio);
```



Vnode Ops

```
int (*vop creat)(struct vnode *dir,
               const char *name, int excl,
               struct vnode **result);
int (*vop_symlink)(struct vnode *dir,
                 const char *contents, const char *name);
int (*vop mkdir)(struct vnode *parentdir,
               const char *name);
int (*vop link)(struct vnode *dir,
              const char *name, struct vnode *file);
int (*vop_remove)(struct vnode *dir,
                const char *name);
int (*vop rmdir)(struct vnode *dir,
               const char *name):
int (*vop rename)(struct vnode *vn1, const char *name1,
                struct vnode *vn2, const char *name2);
int (*vop lookup)(struct vnode *dir,
                char *pathname, struct vnode **result);
int (*vop lookparent)(struct vnode *dir,
                    char *pathname, struct vnode **result,
                    char *buf, size t len);
                      COMP3231/COMP9201 04s2
```

Vnode Ops

- Note that most operation are on vnodes. How do we operate on file names?
 - Higher level API on names that uses the internal VOP * functions

```
int vfs_open(char *path, int openflags, struct vnode **ret);
void vfs_close(struct vnode *vn);
int vfs_readlink(char *path, struct uio *data);
int vfs_symlink(const char *contents, char *path);
int vfs_mkdir(char *path);
int vfs_link(char *oldpath, char *newpath);
int vfs_remove(char *path);
int vfs_remdir(char *path);
int vfs_rename(char *oldpath, char *newpath);
int vfs_chdir(char *path);
int vfs_getcwd(struct uio *buf);
```



Example: OS/161 emufs vnode ops

```
/*
* Function table for emufs
  files.
*/
static const struct vnode ops
  emufs_fileops = {
  VOP MAGIC, /* mark this a
  valid vnode ops table */
  emufs open,
  emufs close,
  emufs reclaim,
  emufs read,
  NOTDIR, /* readlink */
  NOTDIR, /* getdirentry */
  emufs write,
  emufs ioctl,
  emufs stat,
```




```
emufs file gettype,
emufs tryseek,
emufs fsync,
UNIMP, /* mmap */
emufs truncate,
NOTDIR, /* namefile */
NOTDIR, /* creat */
NOTDIR, /* symlink */
NOTDIR, /* mkdir */
NOTDIR, /* link */
NOTDIR, /* remove */
NOTDIR, /* rmdir */
NOTDIR, /* rename */
NOTDIR, /* lookup */
NOTDIR, /* lookparent */
```



};

Buffer Cache

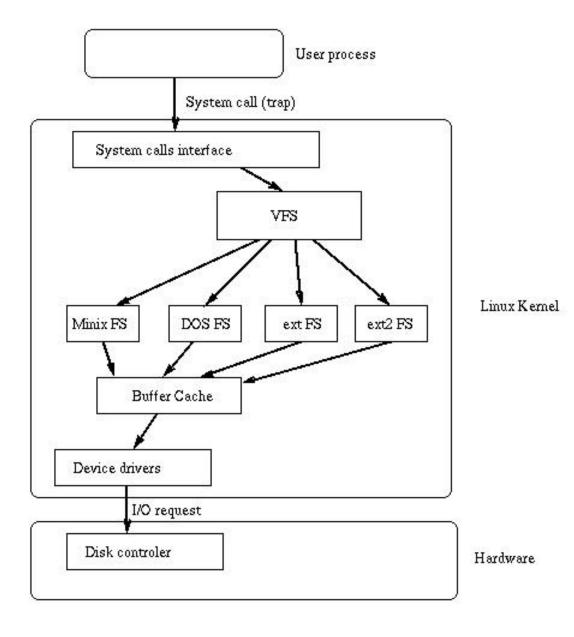



Buffer

Buffer:


- Temporary storage used when transferring data between two entities
 - Especially when the entities work at different rates
 - Or when the unit of transfer is incompatible
 - Example: between application program and disk



Buffering Disk Blocks

Allow applications to work with arbitrarily sized region of a file


Buffers Apps can still optimise for a particular block size in Kernel **RAM**

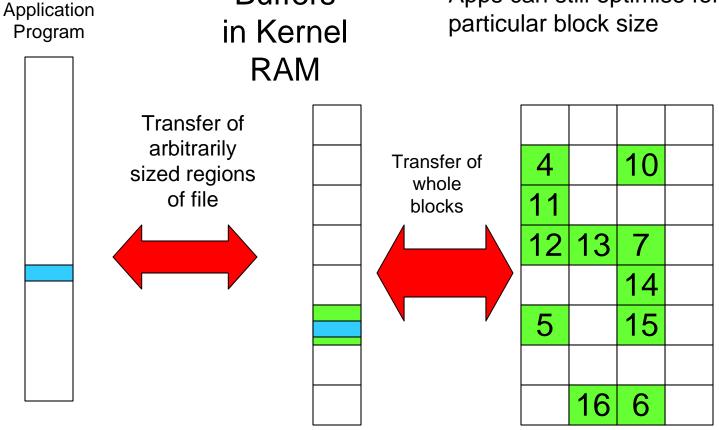




Buffering Disk Blocks

Writes can return immediately after copying to kernel buffer
 Avoids waiting until write to

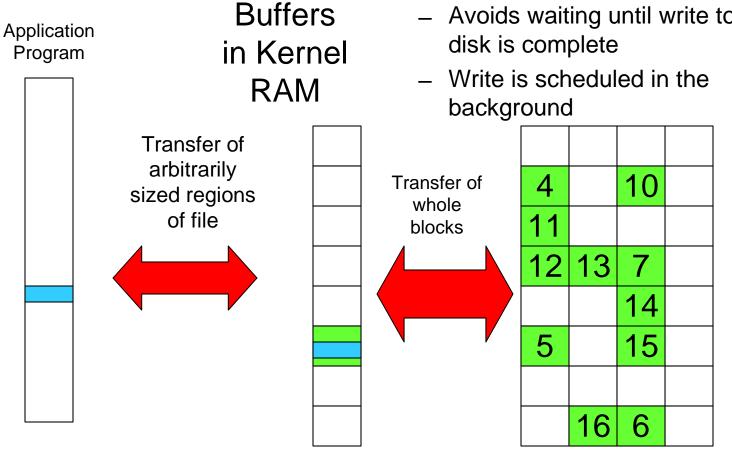



Buffering Disk Blocks

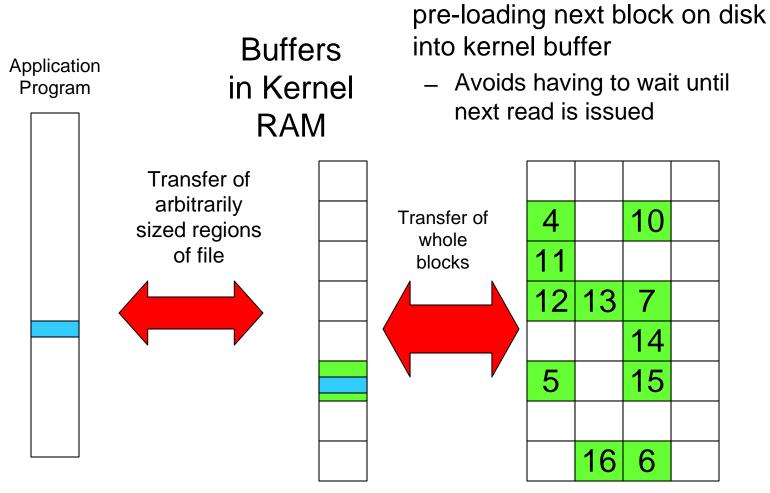




Can implement read-ahead by

Cache

- Cache:
 - Fast storage used to temporarily hold data to speed up repeated access to the data
 - Example: Main memory can cache disk blocks



Caching Disk Blocks

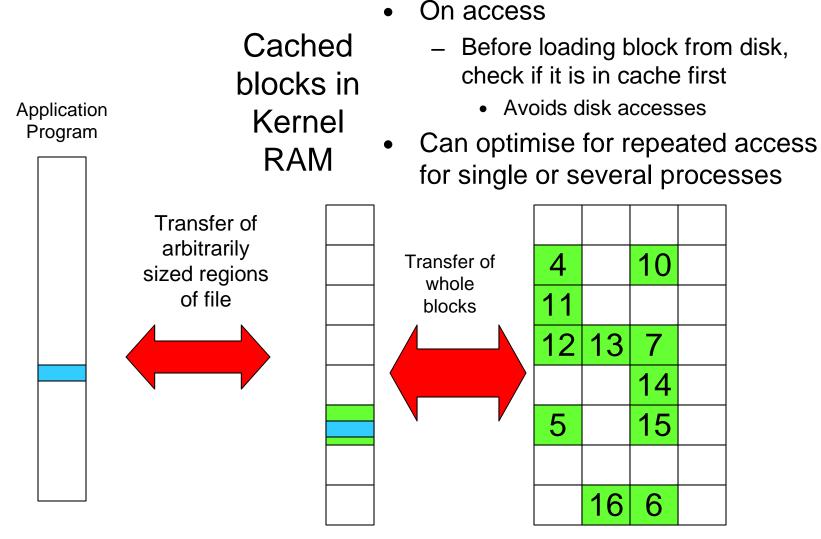


Buffering and caching are related

- Data is read into buffer; extra cache copy would be wasteful
- After use, block should be put in cache
- Future access may hit cached copy
- Cache utilises unused kernel memory space; may have to shrink

Unix Buffer Cache

On read

- Hash the device#, block#
- Check if match in buffer cache
- Yes, simply use in-memory copy
- No, follow the collision chain
- If not found, we load block from disk into cache

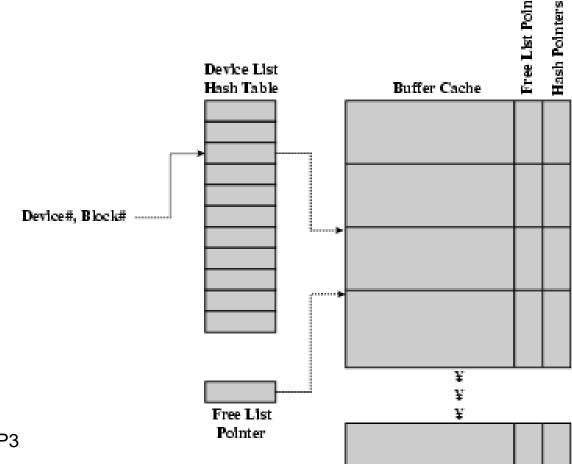



Replacement

- What happens when the buffer cache is full and we need to read another block into memory?
 - We must choose an existing entry to replace
 - Similar to page replacement policy
 - Can use FIFO, Clock, LRU, etc.
 - Except disk accesses are much less frequent and take longer than memory references, so LRU is possible
 - However, is strict LRU what we want?
 - What is different between paged data in RAM and file data in RAM?



File System Consistency

- Paged data is not expected to survive crashes or power failures
- File data is expected to survive
- Strict LRU could keep critical data in memory forever if it is frequently used.



File System Consistency

- Generally, cached disk blocks are prioritised in terms of how critical they are to file system consistency
 - Directory blocks, inode blocks if lost can corrupt the entire filesystem
 - E.g. imagine losing the root directory
 - These blocks are usually scheduled for immediate write to disk
 - Data blocks if lost corrupt only the file that they are associated with
 - These block are only scheduled for write back to disk periodically
 - In UNIX, flushd (flush daemon) flushes all modified blocks to disk every 30 seconds




File System Consistency

- Alternatively, use a write-through cache
 - All modified blocks are written immediately to disk
 - Generates much more disk traffic
 - Temporary files written back
 - Multiple updates not combined
 - Used by DOS
 - Gave okay consistency when
 - Floppies were removed from drives
 - Users were constantly resetting (or crashing) their machines
 - Still used, e.g. USB storage devices




Linux 2.4.0: Lines of Code per Component

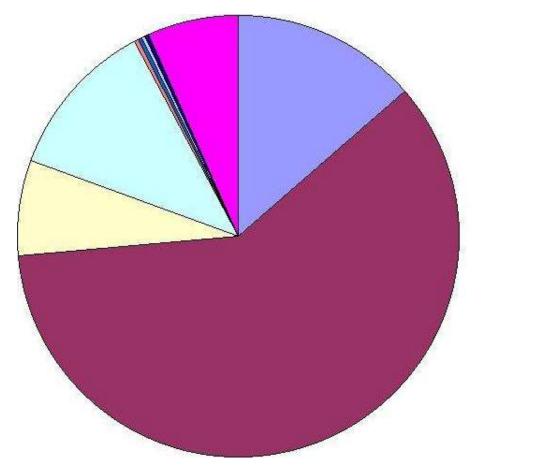





Alternative representation of chained allocation

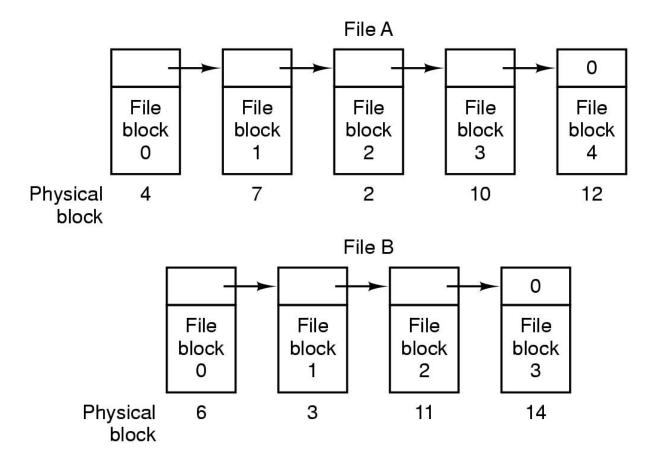

Storing a file as a linked list of disk blocks



Method of File Allocation

- Linked allocation with file allocation table in RAM
 - Avoids disk accesses when searching for a block
 - Entire block is available for data
 - Table gets too large for large file systems
 - Can cache parts of it, but still can consume significant RAM or generate disk traffic
 - Used in MS-DOS, OS/2

