COMP4161: Advanced Topics in Software Verification

C

Gerwin Klein, June Andronick, Ramana Kumar

S2/2016

data61.csiro.au

Last Time

 © Data61, CSIRO: provided under Creative Commons Attribution License

Last Time

➜ Deep and shallow embeddings

 © Data61, CSIRO: provided under Creative Commons Attribution License

Last Time

- ➜ Deep and shallow embeddings
- ➜ Isabelle records

 © Data61, CSIRO: provided under Creative Commons Attribution License

Last Time

- ➜ Deep and shallow embeddings
- ➜ Isabelle records
- ➜ Nondeterministic State Monad with Failure

 © Data61, CSIRO: provided under Creative Commons Attribution License

Last Time

- ➜ Deep and shallow embeddings
- ➜ Isabelle records
- ➜ Nondeterministic State Monad with Failure
- ➜ Monadic Weakest Predondition Rules

 © Data61, CSIRO: provided under Creative Commons Attribution License

Content

- ➜ Intro & motivation, getting started [1]
- ➜ Foundations & Principles
  - Lambda Calculus, natural deduction [1,2]
  - Higher Order Logic [3[a]]
  - Term rewriting [4]
- ➜ Proof & Specification Techniques
  - Inductively defined sets, rule induction [5]
  - Datatypes, recursion, induction [6, 7]
  - Hoare logic, proofs about programs, C verification [8[b],9]
  - (mid-semester break)
  - Writing Automated Proof Methods [10]
  - Isar, codegen, typeclasses, locales [11[c],12]

---

[a] a1 due; [b] a2 due; [c] a3 due

 © Data61, CSIRO: provided under Creative Commons Attribution License

wp

apply (wp *extra_wp_rules*)

Tactic for automatic application of **weakest precondition rules**

 © Data61, CSIRO: provided under Creative Commons Attribution License

wp

apply (wp *extra_wp_rules*)

Tactic for automatic application of **weakest precondition rules**

- ➜ Originally developed by Thomas Sewell, NICTA, for the seL4 proofs
- ➜ Knows about a huge collection of existing wp rules for monads
- ➜ Works best when precondition is a schematic variable
- ➜ related tool: **wpc** for Hoare reasoning over **case** statements

 © Data61, CSIRO: provided under Creative Commons Attribution License

wp

apply (wp *extra_wp_rules*)

Tactic for automatic application of **weakest precondition rules**

- ➜ Originally developed by Thomas Sewell, NICTA, for the seL4 proofs
- ➜ Knows about a huge collection of existing wp rules for monads
- ➜ Works best when precondition is a schematic variable
- ➜ related tool: **wpc** for Hoare reasoning over **case** statements

When used with **AutoCorres**, allows automated reasoning about C programs.

 © Data61, CSIRO: provided under Creative Commons Attribution License

wp

apply (wp *extra_wp_rules*)

Tactic for automatic application of **weakest precondition rules**

- ➜ Originally developed by Thomas Sewell, NICTA, for the seL4 proofs
- ➜ Knows about a huge collection of existing wp rules for monads
- ➜ Works best when precondition is a schematic variable
- ➜ related tool: **wpc** for Hoare reasoning over **case** statements

When used with **AutoCorres**, allows automated reasoning about C programs.

Today we will learn about AutoCorres and C verification.

 © Data61, CSIRO: provided under Creative Commons Attribution License

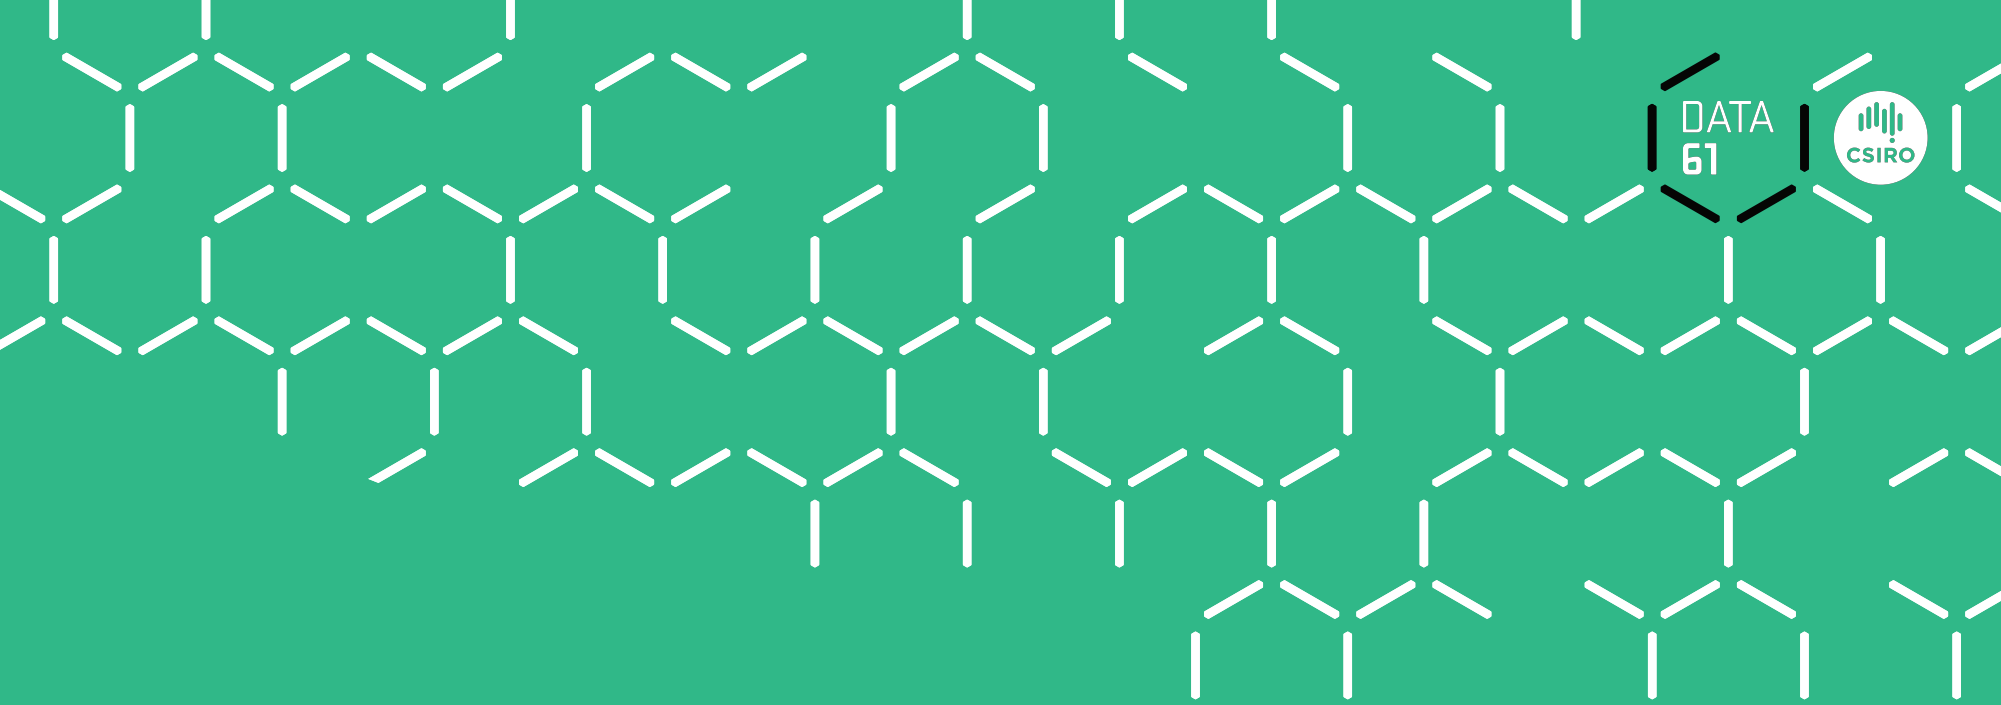

Demo

Introduction to AutoCorres and wp

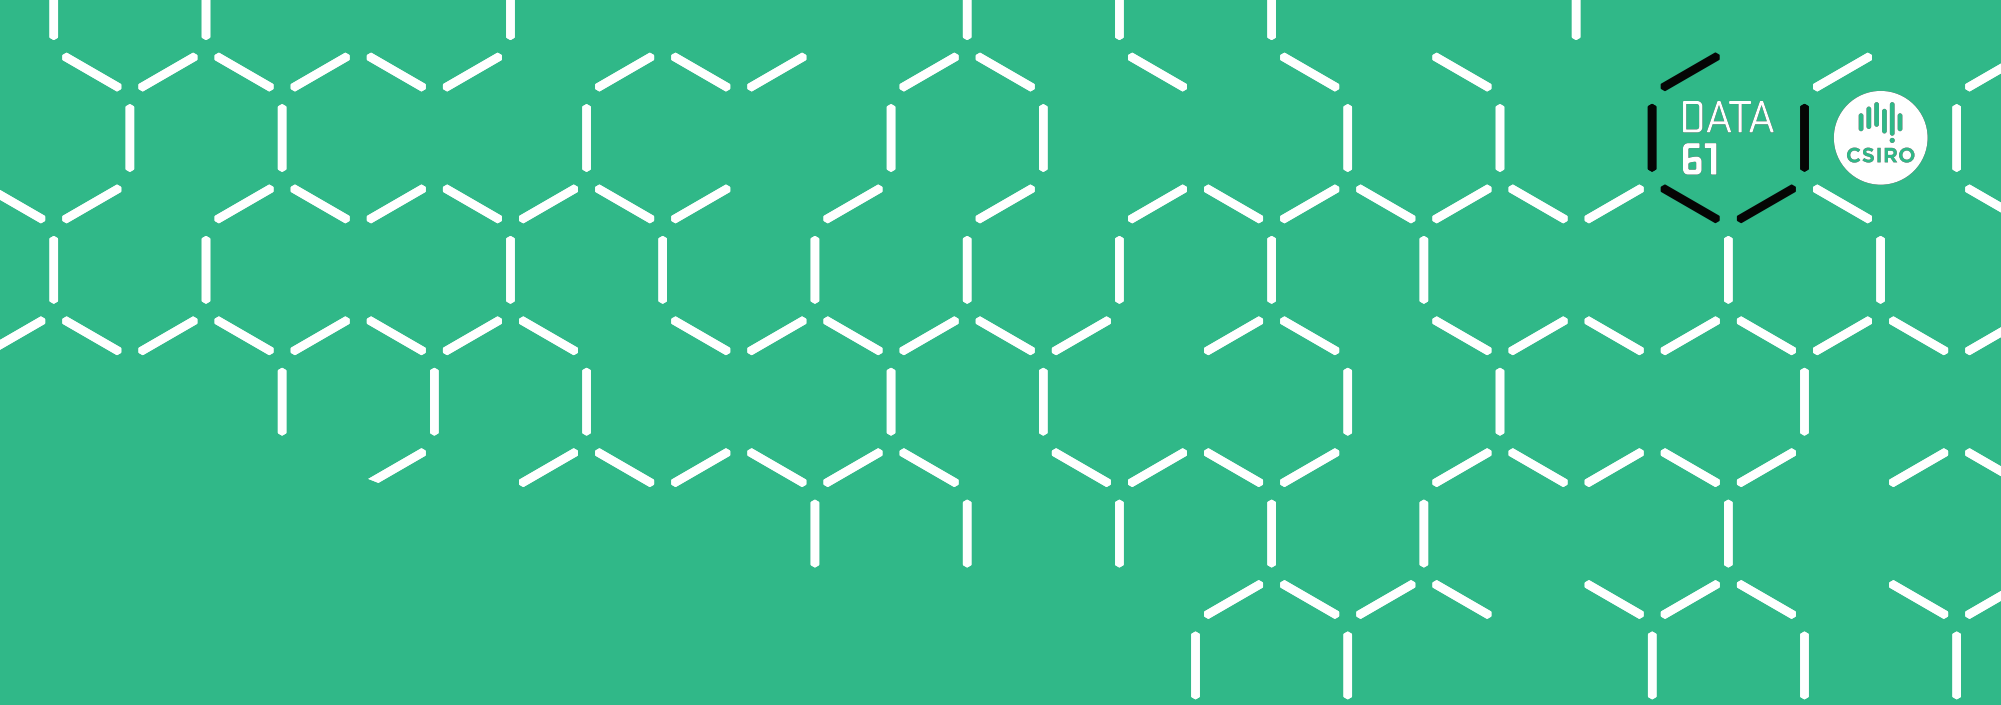

A Brief Overview of C and Simpl

C

Main new problems in verifying C programs:

 © Data61, CSIRO: provided under Creative Commons Attribution License

C

Main new problems in verifying C programs:

- ➜ expressions with side effects
- ➜ more control flow (do/while, for, break, continue, return)
- ➜ local variables and blocks
- ➜ functions & procedures
- ➜ concrete C data types
- ➜ C memory model and C pointers

 © Data61, CSIRO: provided under Creative Commons Attribution License

C

Main new problems in verifying C programs:

- ➜ expressions with side effects
- ➜ more control flow (do/while, for, break, continue, return)
- ➜ local variables and blocks
- ➜ functions & procedures
- ➜ concrete C data types
- ➜ C memory model and C pointers

C is not a nice language for reasoning.

 © Data61, CSIRO: provided under Creative Commons Attribution License

C

Main new problems in verifying C programs:

- ➜ expressions with side effects
- ➜ more control flow (do/while, for, break, continue, return)
- ➜ local variables and blocks
- ➜ functions & procedures
- ➜ concrete C data types
- ➜ C memory model and C pointers

C is not a nice language for reasoning.

Things are going to get ugly.

 © Data61, CSIRO: provided under Creative Commons Attribution License

C

Main new problems in verifying C programs:

- ➜ expressions with side effects
- ➜ more control flow (do/while, for, break, continue, return)
- ➜ local variables and blocks
- ➜ functions & procedures
- ➜ concrete C data types
- ➜ C memory model and C pointers

C is not a nice language for reasoning.

Things are going to get ugly.

AutoCorres will help, later.

 © Data61, CSIRO: provided under Creative Commons Attribution License

C Parser: translates C into Simpl

Simpl: deeply embedded imperative language in Isabelle.

 © Data61, CSIRO: provided under Creative Commons Attribution License

C Parser: translates C into Simpl

Simpl: deeply embedded imperative language in Isabelle.

- ➜ generic imperative language by Norbert Schirmer, TU Munich
- ➜ state space and basic expressions/statements can be instantiated
- ➜ has operational semantics
- ➜ has its own Hoare logic with soundness and completeness proof, plus automated vcg

 © Data61, CSIRO: provided under Creative Commons Attribution License

C Parser: translates C into Simpl

Simpl: deeply embedded imperative language in Isabelle.

- ➜ generic imperative language by Norbert Schirmer, TU Munich
- ➜ state space and basic expressions/statements can be instantiated
- ➜ has operational semantics
- ➜ has its own Hoare logic with soundness and completeness proof, plus automated vcg

C Parser: parses C, produces Simpl definitions in Isabelle

- ➜ written by Michael Norrish, NICTA and ANU
- ➜ Handles a non-trivial subset of C
- ➜ Originally written to verify seL4's C implementation
- ➜ AutoCorres is built on top of the C Parser

 © Data61, CSIRO: provided under Creative Commons Attribution License

Commands in Simpl

```
datatype ('s, 'p, 'f) com =
      Skip
    | Basic "'s ⇒ 's"
    | Spec "('s * 's) set"
    | Seq "('s, 'p, 'f) com" "('s, 'p, 'f) com"
    | Cond "'s set" "('s, 'p, 'f) com"  "('s, 'p, 'f) com"
    | While "'s set" "('s, 'p, 'f) com"
    | Call 'p
    | DynCom "'s ⇒ ('s, 'p, 'f) com"
    | Guard 'f "'s set" "('s, 'p, 'f) com"
    | Throw
    | Catch "('s, 'p, 'f) com" "('s, 'p, 'f) com"
```

's = state, **'p** = procedure names, **'f** = faults

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

➜ **a = a * b** — Fine: easy to translate into Isabelle

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

- ➜ **a = a * b** — Fine: easy to translate into Isabelle
- ➜ **x = f(h)** — Fine: may have side effects, but can be translated sanely.

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

- ➜ **a = a * b** — Fine: easy to translate into Isabelle
- ➜ **x = f(h)** — Fine: may have side effects, but can be translated sanely.
- ➜ **i = ++i - i++**

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

- ➜ **a = a * b** — Fine: easy to translate into Isabelle
- ➜ **x = f(h)** — Fine: may have side effects, but can be translated sanely.
- ➜ **i = ++i - i++** — Seriously? What does that even mean?

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

- ➜ **a = a * b** — Fine: easy to translate into Isabelle
- ➜ **x = f(h)** — Fine: may have side effects, but can be translated sanely.
- ➜ **i = ++i - i++** — Seriously? What does that even mean? Make this an error, force programmer to write instead:
  i0 = i; i++; i = i - i0; (or just **i = 1**)

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

- ➜ **a = a * b** — Fine: easy to translate into Isabelle
- ➜ **x = f(h)** — Fine: may have side effects, but can be translated sanely.
- ➜ **i = ++i - i++** — Seriously? What does that even mean? Make this an error, force programmer to write instead:
  i0 = i; i++; i = i - i0; (or just **i = 1**)
- ➜ **x = f(h) + g(x)**

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

- ➜ **a = a * b** — Fine: easy to translate into Isabelle
- ➜ **x = f(h)** — Fine: may have side effects, but can be translated sanely.
- ➜ **i = ++i - i++** — Seriously? What does that even mean? Make this an error, force programmer to write instead:
  i0 = i; i++; i = i - i0; (or just **i = 1**)
- ➜ **x = f(h) + g(x)** — Ok if **g** and **h** do not have any side effects
  $\Longrightarrow$ Prove all functions in expressions are side-effect free

 © Data61, CSIRO: provided under Creative Commons Attribution License

Expressions with side effects

```
a = a * b;    x = f(h);    i = ++i - i++;    x = f(h) + g(x);
```

- ➜ **a = a * b** — Fine: easy to translate into Isabelle
- ➜ **x = f(h)** — Fine: may have side effects, but can be translated sanely.
- ➜ **i = ++i - i++** — Seriously? What does that even mean? Make this an error, force programmer to write instead:
  i0 = i; i++; i = i - i0; (or just **i = 1**)
- ➜ **x = f(h) + g(x)** — Ok if **g** and **h** do not have any side effects
  $\Longrightarrow$ Prove all functions in expressions are side-effect free

Alternative:

Explicitly model nondeterministic order of execution in expressions.

 © Data61, CSIRO: provided under Creative Commons Attribution License

Control flow

```
do { c } while (condition);
```

Already can treat normal while-loops! Automatically translate into:

```
c; while (condition) { c }
```

Similarly:

```
for (init; condition; increment) { c }
```

becomes

```
init; while (condition) { c; increment; }
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

More control flow: break/continue

```
while (condition) {
    foo;
    if (Q) continue;
    bar;
    if (P) break;
}
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

More control flow: break/continue

```
while (condition) {
    foo;
    if (Q) continue;
    bar;
    if (P) break;
}
```

Non-local control flow: **continue** goes to condition, **break** goes to end.

 © Data61, CSIRO: provided under Creative Commons Attribution License

More control flow: break/continue

```
while (condition) {
    foo;
    if (Q) continue;
    bar;
    if (P) break;
}
```

Non-local control flow: **continue** goes to condition, **break** goes to end. Can be modelled with exceptions:

 © Data61, CSIRO: provided under Creative Commons Attribution License

More control flow: break/continue

```
while (condition) {
    foo;
    if (Q) continue;
    bar;
    if (P) break;
}
```

Non-local control flow: **continue** goes to condition, **break** goes to end.
Can be modelled with exceptions:

➜ throw exception **'continue'**, catch at end of body.

 © Data61, CSIRO: provided under Creative Commons Attribution License

More control flow: break/continue

```
while (condition) {
    foo;
    if (Q) continue;
    bar;
    if (P) break;
}
```

Non-local control flow: **continue** goes to condition, **break** goes to end.
Can be modelled with exceptions:

- ➜ throw exception **'continue'**, catch at end of body.
- ➜ throw exception **'break'**, catch after loop.

 © Data61, CSIRO: provided under Creative Commons Attribution License

Break/continue

Break/continue example becomes:

```
try {
    while (condition) {
        try {
            foo;
            if (Q) { exception = 'continue'; throw; }
            bar;
            if (P) { exception = 'break'; throw; }
        } catch { if (exception == 'continue') SKIP else throw; }
    }
} catch { if (exception == 'break') SKIP else throw; }
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Break/continue

Break/continue example becomes:

```
try {
    while (condition) {
        try {
            foo;
            if (Q) { exception = 'continue'; throw; }
            bar;
            if (P) { exception = 'break'; throw; }
        } catch { if (exception == 'continue') SKIP else throw; }
    }
} catch { if (exception == 'break') SKIP else throw; }
```

This is not C any more. But it models C behaviour!

 © Data61, CSIRO: provided under Creative Commons Attribution License

Break/continue

Break/continue example becomes:

```
try {
    while (condition) {
        try {
            foo;
            if (Q) { exception = 'continue'; throw; }
            bar;
            if (P) { exception = 'break'; throw; }
        } catch { if (exception == 'continue') SKIP else throw; }
    }
} catch { if (exception == 'break') SKIP else throw; }
```

This is not C any more. But it models C behaviour!

Need to be careful that only the translation has access to exception state.

 © Data61, CSIRO: provided under Creative Commons Attribution License

Return

```
if (P) return x;
foo;
return y;
```

Similar non-local control flow.

 © Data61, CSIRO: provided under Creative Commons Attribution License

Return

```
if (P) return x;
foo;
return y;
```

Similar non-local control flow. **Similar solution:** use throw/try/catch

```
try {
    if (P) { return_val = x; exception = 'return'; throw; }
    foo;
    return_val = y; exception = 'return'; throw;
} catch {
    SKIP
}
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Formal procedure parameters and local variables

Simpl only has one global state space.

Basic idea:

- ➜ separate all locals and all globals
- ➜ keep both in one state space record
- ➜ on procedure entry, set formal parameters to actual values
- ➜ on procedure exit, restore previous values of all locals

 © Data61, CSIRO: provided under Creative Commons Attribution License

Formal procedure parameters and local variables

Simpl only has one global state space.

Basic idea:

- ➜ separate all locals and all globals
- ➜ keep both in one state space record
- ➜ on procedure entry, set formal parameters to actual values
- ➜ on procedure exit, restore previous values of all locals

Implemented using DynCom:

call init body restore result =
DynCom (λs. init; body; DynCom (λt. restore s t; result t))

 © Data61, CSIRO: provided under Creative Commons Attribution License

Formal procedure parameters and local variables

Simpl only has one global state space.

Basic idea:

- ➜ separate all locals and all globals
- ➜ keep both in one state space record
- ➜ on procedure entry, set formal parameters to actual values
- ➜ on procedure exit, restore previous values of all locals

Implemented using DynCom:

call init body restore result =
DynCom (λs. init; body; DynCom (λt. restore s t; result t))

Example: for procedure f(x) = { r = x + 2 }

y = CALL f(7) $\equiv$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Formal procedure parameters and local variables

Simpl only has one global state space.

Basic idea:

- ➜ separate all locals and all globals
- ➜ keep both in one state space record
- ➜ on procedure entry, set formal parameters to actual values
- ➜ on procedure exit, restore previous values of all locals

Implemented using DynCom:

call init body restore result =
DynCom (λs. init; body; DynCom (λt. restore s t; result t))

Example: for procedure f(x) = { r = x + 2 }

y = CALL f(7) ≡
call (x = 7) (r = x + 2) (λs t. s (| globals := globals t |)) (λt. y = r t)

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres

AutoCorres

AutoCorres: reduces the pain in reasoning about C code

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres

AutoCorres: reduces the pain in reasoning about C code

- ➜ Written by David Greenaway, NICTA and UNSW
- ➜ Converts C/Simpl into (monadic) shallow embedding in Isabelle
- ➜ Shallow embedding easier to reason about than Simpl

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres

AutoCorres: reduces the pain in reasoning about C code

- ➜ Written by David Greenaway, NICTA and UNSW
- ➜ Converts C/Simpl into (monadic) shallow embedding in Isabelle
- ➜ Shallow embedding easier to reason about than Simpl

Is self-certifying: produces Isabelle theorems proving its own correctness

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres

AutoCorres: reduces the pain in reasoning about C code

- ➜ Written by David Greenaway, NICTA and UNSW
- ➜ Converts C/Simpl into (monadic) shallow embedding in Isabelle
- ➜ Shallow embedding easier to reason about than Simpl

Is self-certifying: produces Isabelle theorems proving its own correctness

For each Simpl definition C and its generated shallow embedding A:

- ➜ AutoCorres proves an Isabelle theorem stating that C **refines** A
- ➜ Every behaviour of C has a corresponding behaviour of A
- ➜ Refinement guarantees that properties proved about A will also hold for C.
- ➜ (Provided that A never fails. c.f. Total Correctness)

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres Process

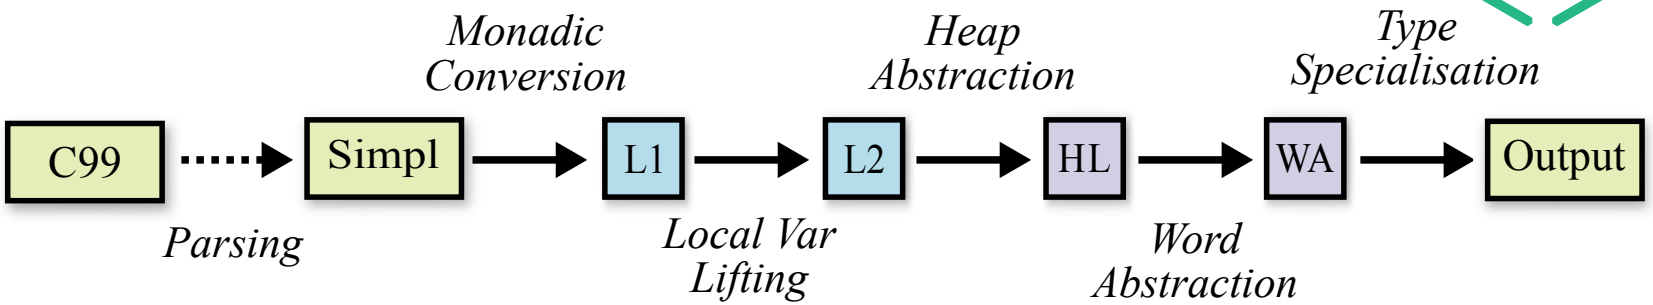

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres Process

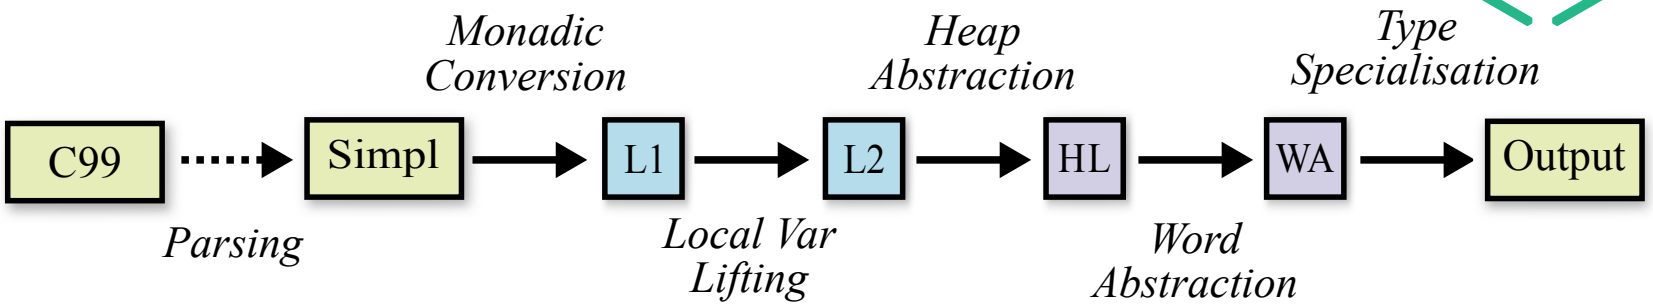

L1: initial monadic shallow embedding

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres Process

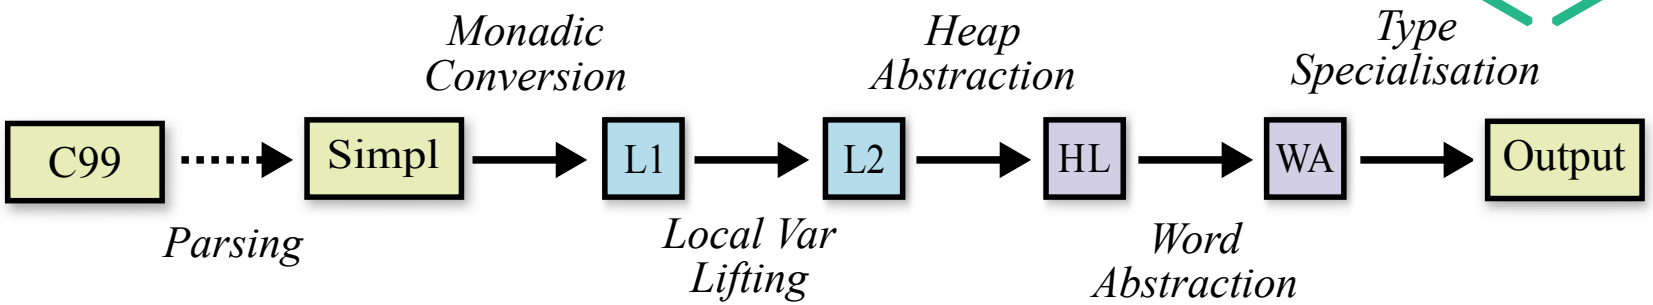

L1: initial monadic shallow embedding

L2: local variables introduced by λ-bindings

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres Process

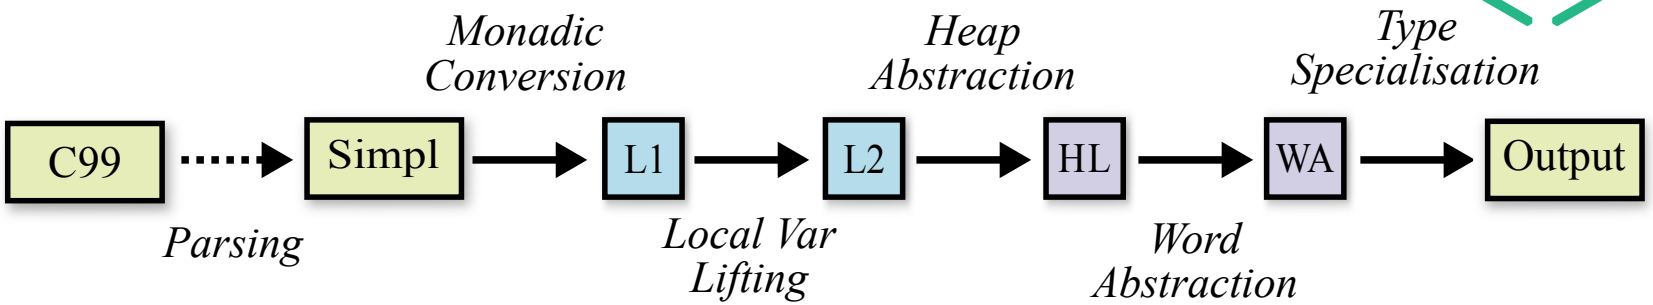

L1: initial monadic shallow embedding

L2: local variables introduced by λ-bindings

HL: heap state abstracted into a set of **typed heaps**

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres Process

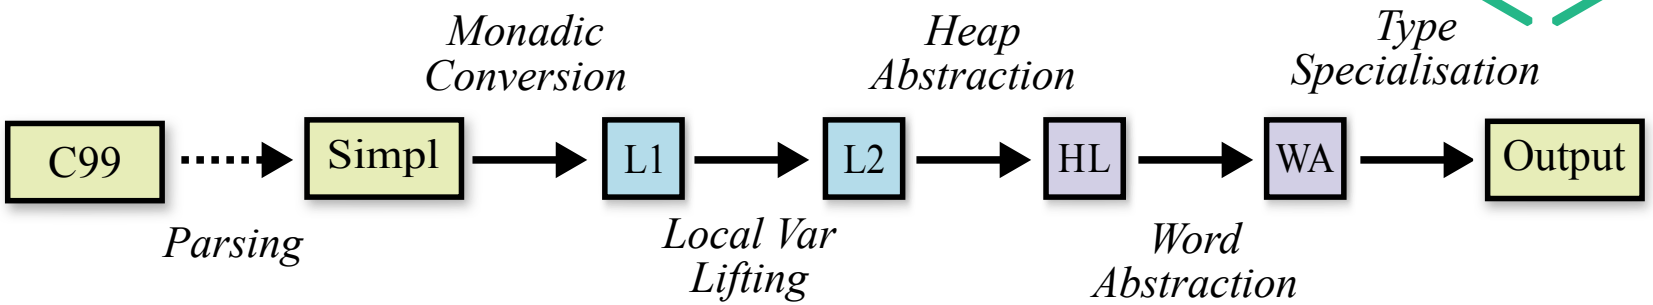

L1: initial monadic shallow embedding

L2: local variables introduced by λ-bindings

HL: heap state abstracted into a set of **typed heaps**

WA: machine words abstracted to idealised integers or nats

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres Process

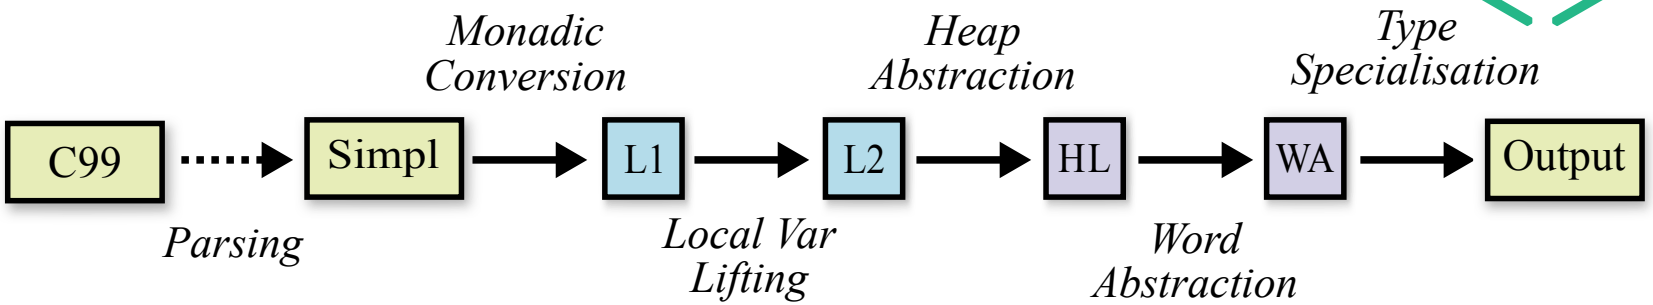

L1: initial monadic shallow embedding

L2: local variables introduced by λ-bindings

HL: heap state abstracted into a set of **typed heaps**

WA: machine words abstracted to idealised integers or nats

Output: human-readable output with **type strengthening**, polish

 © Data61, CSIRO: provided under Creative Commons Attribution License

AutoCorres Process

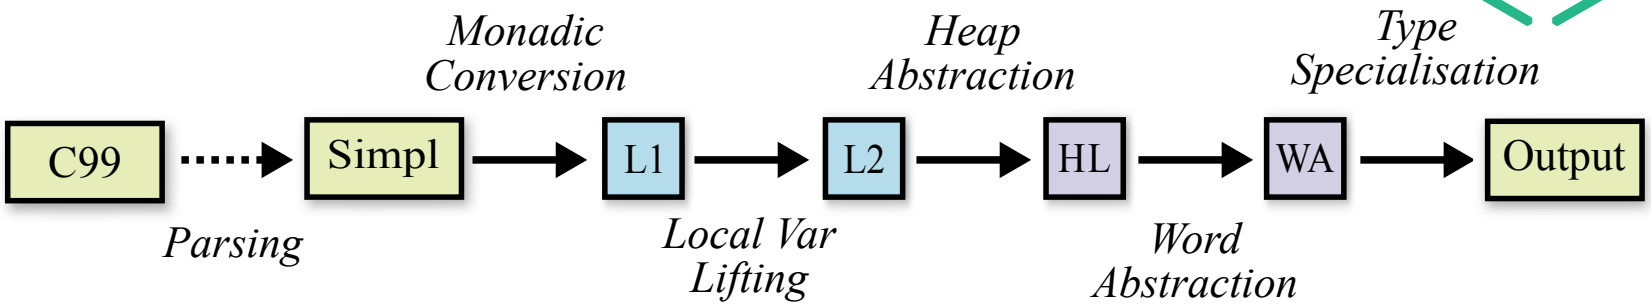

L1: initial monadic shallow embedding

L2: local variables introduced by λ-bindings

HL: heap state abstracted into a set of **typed heaps**

WA: machine words abstracted to idealised integers or nats

Output: human-readable output with **type strengthening**, polish

On-the-fly proof:
Simpl refines **L1** refines **L2** refines **HL** refines **WA** refines **Output**

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: C99

We will use the following example program to illustrate each of the phases.

```
unsigned some_func(unsigned *a, unsigned *b, unsigned c) {
  unsigned *p = NULL;

  if (c > 10u){
    p = a;
  } else {
    p = b;
  }

  return *p;
}
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: Simpl

```
some_func_body ≡
TRY
  ´p :== ptr_coerce (Ptr (scast 0));;
  IF 0xA < ´c THEN
    ´p :== ´a
  ELSE
    ´p :== ´b
  FI;;
  Guard C_Guard {|c_guard ´p|}
   (creturn global_exn_var_'_update ret__unsigned_'_update
     (λs. h_val (hrs_mem (t_hrs_' (globals s))) (p_' s)));;
  Guard DontReach {} SKIP
CATCH SKIP END
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: L1 (monadic shallow embedding)

```
l1_some_func ≡ L1_seq (L1_init ret__unsigned_'_update)
 (L1_seq (L1_modify (p_'_update (λ_. ptr_coerce (Ptr (scast 0)))))
   (L1_seq (L1_condition (λs. 0xA < c_' s)
                         (L1_modify (λs. s(|p_' := a_' s|)))
                         (L1_modify (λs. s(|p_' := b_' s|))))
     (L1_seq (L1_guard (λs. c_guard (p_' s)))
       (L1_seq (L1_modify (λs. s(|ret__unsigned_' :=
                h_val (hrs_mem (t_hrs_' (globals s))) (p_' s)|)))
         (L1_modify (global_exn_var_'_update (λ_. Return)))))))
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: L1 (monadic shallow embedding)

```
l1_some_func ≡ L1_seq (L1_init ret__unsigned_'_update)
 (L1_seq (L1_modify (p_'_update (λ_. ptr_coerce (Ptr (scast 0)))))
   (L1_seq (L1_condition (λs. 0xA < c_' s)
                         (L1_modify (λs. s(|p_' := a_' s|)))
                         (L1_modify (λs. s(|p_' := b_' s|))))
     (L1_seq (L1_guard (λs. c_guard (p_' s)))
       (L1_seq (L1_modify (λs. s(|ret__unsigned_' :=
               h_val (hrs_mem (t_hrs_' (globals s))) (p_' s)|)))
         (L1_modify (global_exn_var_'_update (λ_. Return)))))))
```

State type is the same as Simpl, namely a record with fields:

- ➜ **globals**: heap and type information
- ➜ **a_'**, **b_'**, **c_'**, **p_'** (parameters and local variables)
- ➜ **ret__unsigned_'**, **global_exn_var_'** (return value, exception type)

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: L2 (local variables lifted)

```
l2_some_func a b c ≡
L2_seq (L2_condition (λs. 0xA < c)
                     (L2_gets (λs. a) [''p''])
                     (L2_gets (λs. b) [''p'']))
  (λp. L2_seq (L2_guard (λs. c_guard p))
     (λ_. L2_gets (λs. h_val (hrs_mem (t_hrs_' s)) p) [''ret'']))
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: L2 (local variables lifted)

```
l2_some_func a b c ≡
L2_seq (L2_condition (λs. 0xA < c)
                     (L2_gets (λs. a) [''p''])
                     (L2_gets (λs. b) [''p'']))
  (λp. L2_seq (L2_guard (λs. c_guard p))
     (λ_. L2_gets (λs. h_val (hrs_mem (t_hrs_' s)) p) [''ret'']))
```

State is a record with just the **globals** field

- ➜ function now takes its parameters as arguments
- ➜ local variable **p** now passed via λ-binding
- ➜ **L2_gets** annotated with local variable names
- ➜ This ensures preservation by later AutoCorres phases

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: HL (heap abstracted into typed heaps)

```
hl_some_func a b c ≡
L2_seq (L2_condition (λs. 0xA < c)
                     (L2_gets (λs. a) [''p''])
                     (L2_gets (λs. b) [''p'']))
  (λr. L2_seq (L2_guard (λs. is_valid_w32 s r))
    (λ_. L2_gets (λs. heap_w32 s r) [''ret'']))
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: HL (heap abstracted into typed heaps)

```
hl_some_func a b c ≡
L2_seq (L2_condition (λs. 0xA < c)
                     (L2_gets (λs. a) [''p''])
                     (L2_gets (λs. b) [''p'']))
  (λr. L2_seq (L2_guard (λs. is_valid_w32 s r))
    (λ_. L2_gets (λs. heap_w32 s r) [''ret'']))
```

State is a record with a set of **is_valid_** and **heap_** fields:

- ➜ These store **pointer validity** and **heap contents** respectively, per type
- ➜ above example has only 32-bit word pointers

 © Data61, CSIRO: provided under Creative Commons Attribution License

Heap Abstraction

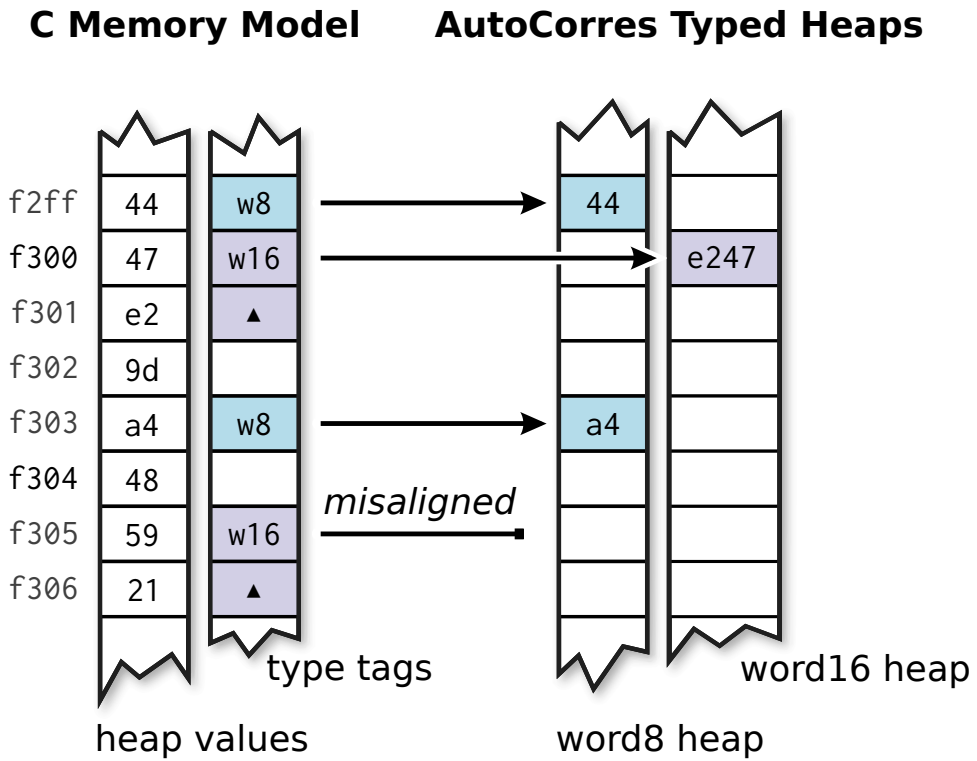

 © Data61, CSIRO: provided under Creative Commons Attribution License

Heap Abstraction

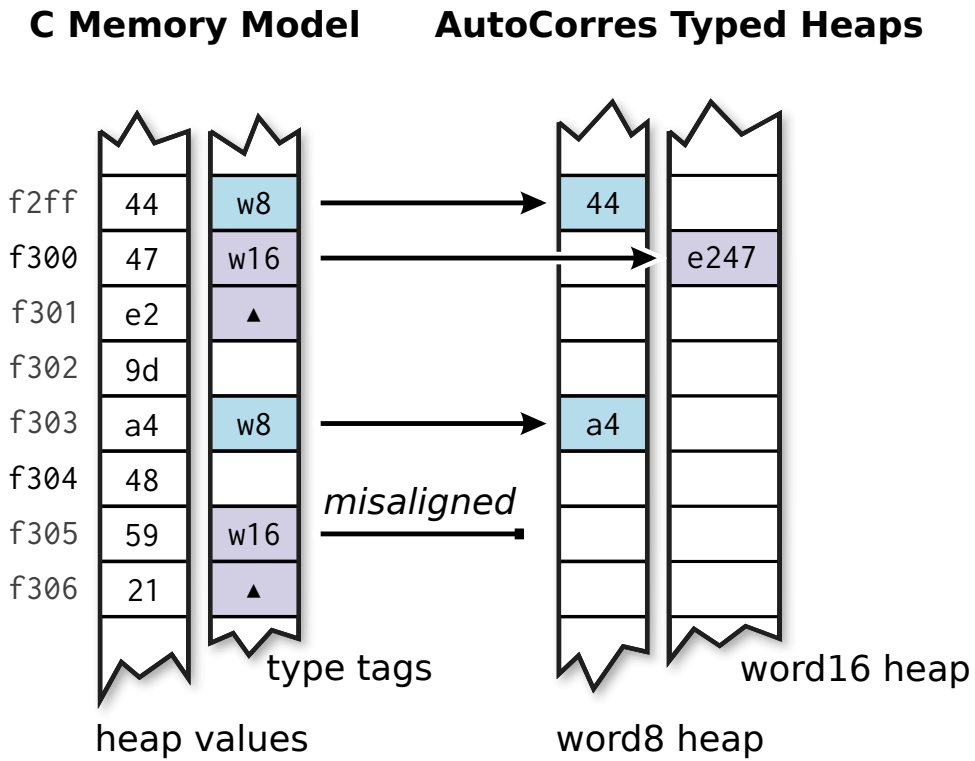

C Memory Model: by Harvey Tuch

- ➜ **Heap** is a mapping from 32-bit addresses to bytes: 32 word ⇒ 8 word
- ➜ **Heap Type Description** stores type information for each heap location

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: WA (words abstracted to ints and nats)

```
wa_some_func a b c ≡
L2_seq (L2_condition (λs. 10 < c)
                     (L2_gets (λs. a) [''p''])
                     (L2_gets (λs. b) [''p'']))
 (λr. L2_seq (L2_guard (λs. is_valid_w32 s r))
       (λ_. L2_gets (λs. unat (heap_w32 s r)) [''ret'']))
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: WA (words abstracted to ints and nats)

```
wa_some_func a b c ≡
L2_seq (L2_condition (λs. 10 < c)
                     (L2_gets (λs. a) [''p''])
                     (L2_gets (λs. b) [''p'']))
 (λr. L2_seq (L2_guard (λs. is_valid_w32 s r))
       (λ_. L2_gets (λs. unat (heap_w32 s r)) [''ret'']))
```

Word abstraction: C **int** $\rightarrow$ Isabelle int, C **unsigned** $\rightarrow$ Isabelle nat

- ➜ Guards inserted to ensure absence of unsigned underflow and overflow
- ➜ Signed under/overflow already has guards, because is undefined behaviour

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: WA (words abstracted to ints and nats)

```
wa_some_func a b c ≡
L2_seq (L2_condition (λs. 10 < c)
                     (L2_gets (λs. a) [''p''])
                     (L2_gets (λs. b) [''p'']))
 (λr. L2_seq (L2_guard (λs. is_valid_w32 s r))
       (λ_. L2_gets (λs. unat (heap_w32 s r)) [''ret'']))
```

Word abstraction: C **int** $\rightarrow$ Isabelle int, C **unsigned** $\rightarrow$ Isabelle nat

- ➜ Guards inserted to ensure absence of unsigned underflow and overflow
- ➜ Signed under/overflow already has guards, because is undefined behaviour

In the example, the **unsigned** argument **c** is now of type **nat**

- ➜ The function also returns a nat result
- ➜ The heap is not abstracted, hence the call to **unat**

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: Output (type strengthening and polish)

```
some_func' a b c ≡
DO p ← oreturn (if 10 < c then a else b);
   oguard (λs. is_valid_w32 s p);
   ogets (λs. unat (heap_w32 s p))
OD
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: Output (type strengthening and polish)

```
some_func' a b c ≡
DO p ← oreturn (if 10 < c then a else b);
   oguard (λs. is_valid_w32 s p);
   ogets (λs. unat (heap_w32 s p))
OD
```

Type Strengthening:

- ➜ Tries to convert output to a more restricted monad
- ➜ The above is in the **option** monad because it doesn't modify the state, but might fail
- ➜ The **type** of the option monad implies it cannot modify state

 © Data61, CSIRO: provided under Creative Commons Attribution License

Example: Output (type strengthening and polish)

```
some_func' a b c ≡
DO p ← oreturn (if 10 < c then a else b);
   oguard (λs. is_valid_w32 s p);
   ogets (λs. unat (heap_w32 s p))
OD
```

Type Strengthening:

- ➜ Tries to convert output to a more restricted monad
- ➜ The above is in the **option** monad because it doesn't modify the state, but might fail
- ➜ The **type** of the option monad implies it cannot modify state

Polish:

- ➜ Simplify output as much as possible
- ➜ The **condition** has been rewritten to a **return** because the condition **10** $<$ **c** doesn't depend on the state

 © Data61, CSIRO: provided under Creative Commons Attribution License

Type Strengthening

Example:

```
unsigned zero(void){ return 0u; }
```

 © Data61, CSIRO: provided under Creative Commons Attribution License

Type Strengthening

Example:

```
unsigned zero(void){ return 0u; }
```

Monad Type	Kind	Type	Example
pure	Pure function	*'a*	0
gets	Read-only, non-failing	*'s* $\Rightarrow$ *'a*	λs. 0
option	Read-only function	*'s* $\Rightarrow$ *'a* option	oreturn 0

 © Data61, CSIRO: provided under Creative Commons Attribution License

Type Strengthening

Example:

```
unsigned zero(void){ return 0u; }
```

Monad Type	Kind	Type	Example
pure	Pure function	*'a*	0
gets	Read-only, non-failing	*'s* $\Rightarrow$ *'a*	λs. 0
option	Read-only function	*'s* $\Rightarrow$ *'a* option	oreturn 0

Effect information now encoded in function **types**

 © Data61, CSIRO: provided under Creative Commons Attribution License

Type Strengthening

Example:

```
unsigned zero(void){ return 0u; }
```

Monad Type	Kind	Type	Example
pure	Pure function	*'a*	0
gets	Read-only, non-failing	*'s* $\Rightarrow$ *'a*	λs. 0
option	Read-only function	*'s* $\Rightarrow$ *'a* option	oreturn 0

Effect information now encoded in function **types**

Later proofs get this information for free!

 © Data61, CSIRO: provided under Creative Commons Attribution License

Type Strengthening

Example:

```
unsigned zero(void){ return 0u; }
```

Monad Type	Kind	Type	Example
pure	Pure function	*'a*	0
gets	Read-only, non-failing	*'s* $\Rightarrow$ *'a*	λs. 0
option	Read-only function	*'s* $\Rightarrow$ *'a* option	oreturn 0

Effect information now encoded in function **types**

Later proofs get this information for free!

Can be controlled by the **ts_force** option of AutoCorres

 © Data61, CSIRO: provided under Creative Commons Attribution License

Option Monad

Another standard monad, familiar from e.g. Haskell

 © Data61, CSIRO: provided under Creative Commons Attribution License

Option Monad

Another standard monad, familiar from e.g. Haskell

Return:

$$\text{oreturn } x \equiv \lambda s.\ \text{Some } x$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Option Monad

Another standard monad, familiar from e.g. Haskell

Return:

$$\text{oreturn } x \equiv \lambda s.\ \text{Some } x$$

Bind:

$$\text{obind } a\ b \equiv \lambda s.\ \text{case } a\ s \text{ of None} \Rightarrow \text{None} \mid \text{Some } r \Rightarrow b\ r\ s$$

- ➜ **Infix notation:** $|\gg$
- ➜ **Do notation:** DO ... OD

 © Data61, CSIRO: provided under Creative Commons Attribution License

Option Monad

Another standard monad, familiar from e.g. Haskell

Return:

$$\text{oreturn } x \equiv \lambda s.\ \text{Some } x$$

Bind:

$$\text{obind } a\ b \equiv \lambda s.\ \text{case } a\ s \text{ of None} \Rightarrow \text{None} \mid \text{Some } r \Rightarrow b\ r\ s$$

- ➜ **Infix notation:** $|\gg$
- ➜ **Do notation:** DO ... OD

Hoare Logic:

$$\text{ovalid } P\ f\ Q \equiv \forall s\ r.\ P\ s \wedge f\ s = \text{Some } r \longrightarrow Q\ r\ s$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Option Monad

Another standard monad, familiar from e.g. Haskell

Return:

$$\text{oreturn } x \equiv \lambda s.\ \text{Some } x$$

Bind:

$$\text{obind } a\ b \equiv \lambda s.\ \text{case } a\ s \text{ of None} \Rightarrow \text{None} \mid \text{Some } r \Rightarrow b\ r\ s$$

- ➜ **Infix notation:** $|\gg$
- ➜ **Do notation:** DO ... OD

Hoare Logic:

$$\text{ovalid } P\ f\ Q \equiv \forall s\ r.\ P\ s \wedge f\ s = \text{Some } r \longrightarrow Q\ r\ s$$

$$\text{ovalid } (P\ x)\ (\text{oreturn } x)\ P$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Option Monad

Another standard monad, familiar from e.g. Haskell

Return:

$$\text{oreturn } x \equiv \lambda s.\ \text{Some } x$$

Bind:

$$\text{obind } a\ b \equiv \lambda s.\ \text{case } a\ s \text{ of None} \Rightarrow \text{None} \mid \text{Some } r \Rightarrow b\ r\ s$$

- ➜ **Infix notation:** $|\gg$
- ➜ **Do notation:** DO ... OD

Hoare Logic:

$$\text{ovalid } P\ f\ Q \equiv \forall s\ r.\ P\ s \wedge f\ s = \text{Some } r \longrightarrow Q\ r\ s$$

$$\text{ovalid } (P\ x)\ (\text{oreturn } x)\ P \qquad \frac{\bigwedge r.\ \text{ovalid } (R\ r)\ (g\ r)\ Q \quad \text{ovalid } P\ f\ R}{\text{ovalid } P\ (f\ |\gg g)\ Q}$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Exception Monad

Exceptions used to model early return, break and continue.

 © Data61, CSIRO: provided under Creative Commons Attribution License

Exception Monad

Exceptions used to model early return, break and continue.

Exception Monad: $'s \Rightarrow (('e + 'a) \times 's)\ \text{set} \times \text{bool}$

- ➜ Instance of the nondeterministic state monad: return-value type is **sum type** $'e + 'a$
- ➜ Sum Type Constructors: **Inl** :: $'e \Rightarrow 'e + 'a$ **Inr** :: $'a \Rightarrow 'e + 'a$
- ➜ **Convention:** Inl used for exceptions, Inr used for ordinary return-values

 © Data61, CSIRO: provided under Creative Commons Attribution License

Exception Monad

Exceptions used to model early return, break and continue.

Exception Monad: $'s \Rightarrow (('e + 'a) \times 's)\ \text{set} \times \text{bool}$

- ➜ Instance of the nondeterministic state monad: return-value type is **sum type** $'e + 'a$
- ➜ Sum Type Constructors: **Inl** :: $'e \Rightarrow 'e + 'a$ **Inr** :: $'a \Rightarrow 'e + 'a$
- ➜ **Convention:** Inl used for exceptions, Inr used for ordinary return-values

Basic Monadic Operations

 © Data61, CSIRO: provided under Creative Commons Attribution License

Exception Monad

Exceptions used to model early return, break and continue.

Exception Monad: $'s \Rightarrow (('e + 'a) \times 's)\ \text{set} \times \text{bool}$

- ➜ Instance of the nondeterministic state monad: return-value type is **sum type** $'e + 'a$
- ➜ Sum Type Constructors: **Inl** :: $'e \Rightarrow 'e + 'a$ **Inr** :: $'a \Rightarrow 'e + 'a$
- ➜ **Convention:** Inl used for exceptions, Inr used for ordinary return-values

Basic Monadic Operations

$\text{returnOk}\ x \equiv \quad \text{return}\ (\text{Inr}\ x)$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Exception Monad

Exceptions used to model early return, break and continue.

Exception Monad: $'s \Rightarrow (('e + 'a) \times 's)\ \text{set} \times \text{bool}$

- ➜ Instance of the nondeterministic state monad: return-value type is **sum type** $'e + 'a$
- ➜ Sum Type Constructors: **Inl** :: $'e \Rightarrow 'e + 'a$ **Inr** :: $'a \Rightarrow 'e + 'a$
- ➜ **Convention:** Inl used for exceptions, Inr used for ordinary return-values

Basic Monadic Operations

$\text{returnOk}\ x \equiv \text{return}\ (\text{Inr}\ x)$ $\text{throwError}\ e \equiv \text{return}\ (\text{Inl}\ e)$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Exception Monad

Exceptions used to model early return, break and continue.

Exception Monad: $'s \Rightarrow (('e + 'a) \times 's)\ \text{set} \times \text{bool}$

- ➜ Instance of the nondeterministic state monad: return-value type is **sum type** $'e + 'a$
- ➜ Sum Type Constructors: **Inl** :: $'e \Rightarrow 'e + 'a$ **Inr** :: $'a \Rightarrow 'e + 'a$
- ➜ **Convention:** Inl used for exceptions, Inr used for ordinary return-values

Basic Monadic Operations

$$\text{returnOk}\ x \equiv \text{return}\ (\text{Inr}\ x) \qquad \text{throwError}\ e \equiv \text{return}\ (\text{Inl}\ e)$$
$$\text{lift}\ b \equiv (\lambda x.\ \text{case}\ x\ \text{of Inl}\ e \Rightarrow \text{throwError}\ e \mid \text{Inr}\ r \Rightarrow b\ r)$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Exception Monad

Exceptions used to model early return, break and continue.

Exception Monad: $'s \Rightarrow (('e + 'a) \times 's)\ \text{set} \times \text{bool}$

- ➜ Instance of the nondeterministic state monad: return-value type is **sum type** $'e + 'a$
- ➜ Sum Type Constructors: **Inl** :: $'e \Rightarrow 'e + 'a$ **Inr** :: $'a \Rightarrow 'e + 'a$
- ➜ **Convention:** Inl used for exceptions, Inr used for ordinary return-values

Basic Monadic Operations

$$\text{returnOk}\ x \equiv \text{return}\ (\text{Inr}\ x) \qquad \text{throwError}\ e \equiv \text{return}\ (\text{Inl}\ e)$$
$$\text{lift}\ b \equiv (\lambda x.\ \text{case}\ x\ \text{of Inl}\ e \Rightarrow \text{throwError}\ e \mid \text{Inr}\ r \Rightarrow b\ r)$$

bindE: $a \gg\!=\text{E}\ b \equiv a \gg\!= (\text{lift b})$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Exception Monad

Exceptions used to model early return, break and continue.

Exception Monad: $'s \Rightarrow (('e + 'a) \times 's)\ \text{set} \times \text{bool}$

- ➜ Instance of the nondeterministic state monad: return-value type is **sum type** $'e + 'a$
- ➜ Sum Type Constructors: **Inl** :: $'e \Rightarrow 'e + 'a$ **Inr** :: $'a \Rightarrow 'e + 'a$
- ➜ **Convention:** Inl used for exceptions, Inr used for ordinary return-values

Basic Monadic Operations

$$\text{returnOk}\ x \equiv \text{return}\ (\text{Inr}\ x) \qquad \text{throwError}\ e \equiv \text{return}\ (\text{Inl}\ e)$$
$$\text{lift}\ b \equiv (\lambda x.\ \text{case}\ x\ \text{of Inl}\ e \Rightarrow \text{throwError}\ e \mid \text{Inr}\ r \Rightarrow b\ r)$$

bindE: $a \gg\!=\text{E}\ b \equiv a \gg\!= (\text{lift b})$ **Do notation:** doE ... odE

 © Data61, CSIRO: provided under Creative Commons Attribution License

Hoare Rules for Exceptions

New kind of Hoare triples to model normal and exceptional cases:

$$\{\!|P|\!\}\ f\ \{\!|Q|\!\}, \{\!|E|\!\}$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Hoare Rules for Exceptions

New kind of Hoare triples to model normal and exceptional cases:

$$\{\!|P|\!\}\ f\ \{\!|Q|\!\},\ \{\!|E|\!\}$$
$$\equiv$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Hoare Rules for Exceptions

New kind of Hoare triples to model normal and exceptional cases:

$$\{\!|P|\!\}\ f\ \{\!|Q|\!\},\ \{\!|E|\!\}$$
$$\equiv$$
$$\{\!|P|\!\}\ f\ \{\!|\lambda x\ s.\ \text{case}\ x\ \text{of Inl}\ e\ \Rightarrow\ E\ e\ s\ \mid\ \text{Inr}\ r\ \Rightarrow\ Q\ r\ s|\!\}$$

Weakest Precondition Rules:

$$\frac{}{\{\!|P\ x|\!\}\ \text{returnOk}\ x\ \{\!|P|\!\},\{\!|E|\!\}} \qquad \frac{}{\{\!|E\ e|\!\}\ \text{throwError}\ e\ \{\!|P|\!\},\{\!|E|\!\}}$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Hoare Rules for Exceptions

New kind of Hoare triples to model normal and exceptional cases:

$$\{\!|P|\!\}\ f\ \{\!|Q|\!\},\ \{\!|E|\!\}$$
$$\equiv$$
$$\{\!|P|\!\}\ f\ \{\!|\lambda x\ s.\ \text{case}\ x\ \text{of Inl}\ e\ \Rightarrow\ E\ e\ s\ \mid\ \text{Inr}\ r\ \Rightarrow\ Q\ r\ s|\!\}$$

Weakest Precondition Rules:

$$\frac{}{\{\!|P\ x|\!\}\ \text{returnOk}\ x\ \{\!|P|\!\},\{\!|E|\!\}} \qquad \frac{}{\{\!|E\ e|\!\}\ \text{throwError}\ e\ \{\!|P|\!\},\{\!|E|\!\}}$$

$$\frac{\bigwedge x.\ \{\!|R\ x|\!\}\ b\ x\ \{\!|Q|\!\},\{\!|E|\!\} \quad \{\!|P|\!\}\ a\ \{\!|R|\!\},\{\!|E|\!\}}{\{\!|P|\!\}\ a\ >>=\text{E}\ b\ \{\!|Q|\!\},\{\!|E|\!\}}$$

 © Data61, CSIRO: provided under Creative Commons Attribution License

Hoare Rules for Exceptions

New kind of Hoare triples to model normal and exceptional cases:

$$\{\!|P|\!\}\ f\ \{\!|Q|\!\},\ \{\!|E|\!\}$$
$$\equiv$$
$$\{\!|P|\!\}\ f\ \{\!|\lambda x\ s.\ \text{case}\ x\ \text{of Inl}\ e\ \Rightarrow\ E\ e\ s\ \mid\ \text{Inr}\ r\ \Rightarrow\ Q\ r\ s|\!\}$$

Weakest Precondition Rules:

$$\frac{}{\{\!|P\ x|\!\}\ \text{returnOk}\ x\ \{\!|P|\!\},\{\!|E|\!\}} \qquad \frac{}{\{\!|E\ e|\!\}\ \text{throwError}\ e\ \{\!|P|\!\},\{\!|E|\!\}}$$

$$\frac{\bigwedge x.\ \{\!|R\ x|\!\}\ b\ x\ \{\!|Q|\!\},\{\!|E|\!\} \quad \{\!|P|\!\}\ a\ \{\!|R|\!\},\{\!|E|\!\}}{\{\!|P|\!\}\ a\ >>=\text{E}\ b\ \{\!|Q|\!\},\{\!|E|\!\}}$$

(other rules analogous)

 © Data61, CSIRO: provided under Creative Commons Attribution License

Today we have seen

- ➜ The automated proof method **wp**
- ➜ The C Parser and translating C into Simpl
- ➜ AutoCorres and translating Simpl into monadic form
- ➜ The option and exception monads

 © Data61, CSIRO: provided under Creative Commons Attribution License